TPC-1570H

Touch Panel Computer with High Luminance 15" XGA TFT LCD

User Manual

Copyright

The documentation and the software included with this product are copyrighted 2010 by Advantech Co., Ltd. All rights are reserved. Advantech Co., Ltd. reserves the right to make improvements in the products described in this manual at any time without notice. No part of this manual may be reproduced, copied, translated or transmitted in any form or by any means without the prior written permission of Advantech Co., Ltd. Information provided in this manual is intended to be accurate and reliable. However, Advantech Co., Ltd. assumes no responsibility for its use, nor for any infringements of the rights of third parties, which may result from its use.

Acknowledgements

Intel and Pentium are trademarks of Intel Corporation.

Microsoft Windows and MS-DOS are registered trademarks of

Microsoft Corp.

All other product names or trademarks are properties of their respective owners.

Part No. 2003157002 3rd Edition

Printed in Taiwan September 2010

Product Warranty (2 years)

Advantech warrants to you, the original purchaser, that each of its products will be free from defects in materials and workmanship for two years from the date of purchase.

This warranty does not apply to any products which have been repaired or altered by persons other than repair personnel authorized by Advantech, or which have been subject to misuse, abuse, accident or improper installation. Advantech assumes no liability under the terms of this warranty as a consequence of such events.

Because of Advantech's high quality-control standards and rigorous testing, most of our customers never need to use our repair service. If an Advantech product is defective, it will be repaired or replaced at no charge during the warranty period. For out-of-warranty repairs, you will be billed according to the cost of replacement materials, service time and freight. Please consult your dealer for more details.

If you think you have a defective product, follow these steps:

1. Collect all the information about the problem encountered. (For example, CPU speed, Advantech products used, other hardware and software used, etc.) Note anything abnormal and list any onscreen messages you get when the problem occurs.
2. Call your dealer and describe the problem. Please have your manual, product, and any helpful information readily available.
3. If your product is diagnosed as defective, obtain an RMA (return merchandize authorization) number from your dealer. This allows us to process your return more quickly.
4. Carefully pack the defective product, a fully-completed Repair and Replacement Order Card and a photocopy proof of purchase date (such as your sales receipt) in a shippable container. A product returned without proof of the purchase date is not eligible for warranty service.
5. Write the RMA number visibly on the outside of the package and ship it prepaid to your dealer.

Declaration of Conformity

CE

This product has passed the CE test for environmental specifications when shielded cables are used for external wiring. We recommend the use of shielded cables. This kind of cable is available from Advantech. Please contact your local supplier for ordering information.

FCC Class A

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Technical Support and Assistance

Step 1. Visit the Advantech web site at **www.advantech.com/support** where you can find the latest information about the product.

Step 2. Contact your distributor, sales representative, or Advantech's customer service center for technical support if you need additional assistance. Please have the following information ready before you call:
- Product name and serial number
- Description of your peripheral attachments
- Description of your software (operating system, version, application software, etc.)
- A complete description of the problem
- The exact wording of any error messages

Safety Instructions

1. Read these safety instructions carefully.
2. Keep this User's Manual for later reference.
3. Disconnect this equipment from any AC outlet before cleaning. Use a damp cloth. Do not use liquid or spray detergents for cleaning.
4. For plug-in equipment, the power outlet socket must be located near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall may cause damage.
7. The openings on the enclosure are for air convection. Protect the equipment from overheating. DO NOT COVER THE OPENINGS.
8. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to avoid damage by transient overvoltage.
12. Never pour any liquid into an opening. This may cause fire or electrical shock.
13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel.
14. If one of the following situations arises, get the equipment checked by service personnel:

a. The power cord or plug is damaged.

b. Liquid has penetrated into the equipment.

c. The equipment has been exposed to moisture.

d. The equipment does not work well, or you cannot get it to work according to the user's manual.

e. The equipment has been dropped and damaged.

f. The equipment has obvious signs of breakage.

15. DO NOT LEAVE THIS EQUIPMENT IN AN ENVIRONMENT WHERE THE STORAGE TEMPERATURE MAY GO BELOW -

20° C (-4° F) OR ABOVE 60° C (140° F). THIS COULD DAMAGE THE EQUIPMENT. THE EQUIPMENT SHOULD BE IN A CONTROLLED ENVIRONMENT.

16. CAUTION: DANGER OF EXPLOSION IF BATTERY IS INCORRECTLY REPLACED. REPLACE ONLY WITH THE SAME OR EQUIVALENT TYPE RECOMMENDED BY THE MANUFACTURER, DISCARD USED BATTERIES ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS.

The sound pressure level at the operator's position according to IEC 704-1:1982 is no more than 70 dB (A).

DISCLAIMER: This set of instructions is given according to IEC 704-1. Advantech disclaims all responsibility for the accuracy of any statements contained herein.

Contents

Chapter 1 General Information 2

1.1 Introduction 2
1.2 Specifications 2
1.2.1 System Kernel 2
1.2.2 I/O Ports 3
1.2.3 Safety and Environment 3
1.3 LCD Specifications 4
1.4 Touchscreen Specifications 5
1.5 Power 5
1.6 I/O Port Arrangement 5
Figure 1.1:I/O port arrangement 5
1.7 Panel Mounting 6
Figure 1.2:Panel Mounting 6
1.8 Exploded Diagram 7
Figure 1.3:Exploded Diagram 7
1.9 Dimensions and cutout 7
Figure 1.4:Dimensions 8

Chapter 2 System Setup 10

Figure 2.1:Unpack the package 10
Figure 2.2:Install CompactFlash memory card 11
Figure 2.3:Power connector 12
Figure 2.4:Power receptor and button pin assignments 12
Figure 2.5:Touchscreen Calibration - 1 13
Figure 2.6:Touchscreen Calibration - 2 13

Chapter 3 System Engine 16

Figure 3.1:Main Board Connector -1 17
Figure 3.2:Main Board Connector -2 17

Chapter 4 Software Configuration 20

4.1 Utilities & Drivers 20
4.1.1 Intel Chipset Software Installation Utility 20
4.1.2 VGA Drivers (Intel(R) Graphics Driver) 20
4.1.3 Intel PRO Network Drivers/software 20
4.1.4 Audio Driver 21
4.1.5 Advantech COM Driver 21
4.1.6 Touchscreen Driver 21
4.1.7 Watchdog Timer Driver 21
4.2 Advantech COM Driver Installation 22
4.3 Watchdog Timer (WDT) Driver Installation 32
4.3.1 Installing the TPC-1570 Watchdog Timer Driver 33
4.3.2 How to Use the TPC-1570H Watchdog Timer 38
4.4 Dual Display Setting 41

Chapter 5 Windows XP Embedded 44
5.1 EWF 44
5.2 HORM 44
5.3 Advantech Utilities 45
5.3.1 Version Information 45
5.3.2 OSLock and OSUnLock 45
5.3.3 HORM 46
Appendix A Serial Port Settings 48
A.1 COM1/ COM3 Connector Definition 48
A.2 COM4 Setting 48
Appendix B Watchdog Timer on WinCE 52
B.1 DeviceIOControl 52
B.2 How to Use the Control Code 54
B.3 Examples 56
Appendix C Watchdog Timer Programming... 60
C.1 Overview 60
C.2 Watchdog Timer Programming 61
Figure C.1:Watchdog timer programming procedure .. 61
Table C.1:Watchdog Timer Registers 62
C.3 Example Programs 63
Appendix D Accessory Kit Assembly 70
D.1 CompactFlash to IDE Transfer Kit 70
Figure D.1:Adapter Board and IDE Cable 70
Figure D.2:Connecting Adapter Board & IDE Cable .. 70
Figure D.3:CompactFlash Slot 71
Figure D.4:Insert the Adapter Board into the CF slot .. 71
Figure D.5:Inserted Adapter Board 71
Figure D.6:Connect the CD-ROM via the IDE Cable . 72
Figure D.7:Plug Power Line into CD-ROM Drive 72
D.2 USB Driver Installation Notice 72
Appendix E HDD Kit Assembly 74
Figure E.1:Removing the Rear Cover 74
Figure E.2:Removing the Top Screws 74
Figure E.3:Removing the HDD kit 75
Figure E.4:Pulling out the HDD bracket 75
Figure E.5:The HDD Bracket 76
Figure E.6:Installing the HDDr 76
Figure E.7:Linking the HDD with the Connector 77
Figure E.8:Fastening the HDD cover 77
Figure E.9:Chamfer 78
Figure E.10:Chamfer & Rubber 78
Figure E.11:Sliding the HDD Into Position 79
Figure E.12:Completed HDD Installation 79
Figure E.13:Mounting the Rubber Cushions 80

Figure E.14:Fastening the HDD Module 80
Figure E.15:Reinstalling the Rear Cover 81
Appendix F Touchscreen Installation & Configuration. 84
F.1 Driver Installation 84
Figure F.1:Setup.exe 84
Figure F.2:Install - Wizard 84
Figure F.3:Install – License Agreement 85
Figure F.4:Install – Completed 85
F.2 Uninstall the Driver 86
Figure F.5:Uninstall -1 86
Figure F.6:Uninstall -2 86
Figure F.7:Uninstall -3 87
F.3 Touchscreen Calibration 87
Figure F.8:Standard Calibration -1 88
Figure F.9:Standard Calibration -2 88
Figure F.10:Standard Calibration -3 89
Figure F.11:Advanced Calibration -1 90
Figure F.12:Advanced Calibration -2 90
Figure F.13:Plot Calibration Data 91
Figure F.14:Draw 92
Figure F.15:Clear Screen 92
Figure F.16:Option 93
Appendix G Fuse Specifications 96
G.1 Fuse Specifications 96
G.2 Fuse Replacement 96
Figure G.1:Fuse Replacement 96

CHAPTER 1

General Information

Sections include:

- Introduction
- Specifications

Chapter 1 General Information

This chapter gives the background information about the TPC-1570H.

1.1 Introduction

The TPC-1570H touch panel computer is state-of-the-art HMI (Human Machine Interface). This 15" display operator interface is an x86-based platform with these key features:

Fanless:
By using a low power processor, the system does not have to rely on fans, which often are unreliable, and causes dust to circulate inside the equipment.

Bright Display:
The bright TFT LCD display suits industrial demands for clear interfaces.

Powerful Communication Capability:
The TPC-1570H provides powerful IO interface for easily communicating with other devices. The IO interface includes serial ports, RS-485 port, parallel port, Ethernet and USB 2.0 support.

Embedded Windows Support:
In addition to the OS support of Windows 2000 and Windows XP, Advantech offers platform support for Windows CE and XP embedded.

1.2 Specifications

1.2.1 System Kernel

CPU: Intel Celeron M (clock rate 600MHz /1GHz), Pentium M 1.4GHz

BIOS: Award 4Mbit flash memory

South Bridge: Intel 855GME/ 852GM GMCH/ICH4 chipset

VGA: Intel 855GME for TPC-1570H-P2AE, C1AE series; Intel 852GM for TPC-1570H-B1AE series; Support 16 MB frame buffer with system memory; Simultaneously support of CRT and LVDS flat panel display.

Ethernet: Intel 82562EZ and Intel 82551QM Ethernet controller; IEEE 802.3u protocol compatible

Watchdog timer: W83627 watchdog timer; 1 ~ 255 sec (system)

IDE: 2 EIDE channels support one IDE compact flash socket on board and one 44 pin (2mm) connector transfer to SATA HDD interface (SATA HDD only support data transfer rate of 1.5Gbits/sec).

1.2.2 I/O Ports

1 parallel port: supports EPP/ ECP/SPP modes

3 serial ports: RS-232 (COM1, COM3) and RS-232/422/485 (COM4, default is RS-485)

2 RJ-45 Ethernet port:

TPC-1570H-P2AE/C1AE: LAN 1 (10/100BaseT)
LAN2 (10/100/1000BaseT)

TPC-1570H-B1AE: LAN 1 (10/100BaseT);
LAN2 (10/100BaseT)

1 PS/2 port: 6-pin mini-DIN ports for keyboard and mouse

2 USB ports: compliant with USB 2.0

1 Compact Flash Slot

1 PCMCIA slot

3 Audio ports: 1 microphone; 1 Line In and 1 Line Out.

1.2.3 Safety and Environment

Safety

FCC Class A and CE certificated

BSMI certificated

The front bezel is compliant with NEMA 4

Environment

Operating Temperature: 0~50 degrees Celsius

Storage temperature: -20~60 degrees Celsius

Humidity: 10~95% @ 40 relative humidity (non-condensing)

Vibration: 1Grms (5~500Hz)

1.3 LCD Specifications

Display Type	TFT color LCD
Size (diagonal)	15”
Maximum Resolution	1024 x 768 (XGA)
Maximum colors	256K
Pixel Pitch (W x H)	0.3075 x 0.3075 mm
Viewing Angle	120
Luminance (cd / m^2)	350
Contrast Ratio	500
Operating Temperature ()	0 ~ 50° C (32-122° F) (Ambient)
Backlight	2 CCFL
Backlight Life Time	50,000 hours

Note	*There might be several bright or dark pixels on the LCD. This comes from the production of the LCD. Such phenomenon is claimed to be normal according to the LCD manufacturers.*

1.4 Touchscreen Specifications

Touchscreen Type	Resistive
Base Glass Construction	Tempered Glass
Resolution	1024 x 1024
Light Transmission	75% typical
Controller	RS232 Interface
Power Rating	3.3 to 5V
Durability	1 million touches

1.5 Power

Input voltage: 18 ~ 32 Vdc (the fuse will be open circuit as input level exceeds 33Vdc)

Typical: 24V@2.4 (57W)

1.6 I/O Port Arrangement

The arrangement of the I/O ports is shown in Figure 1.1.

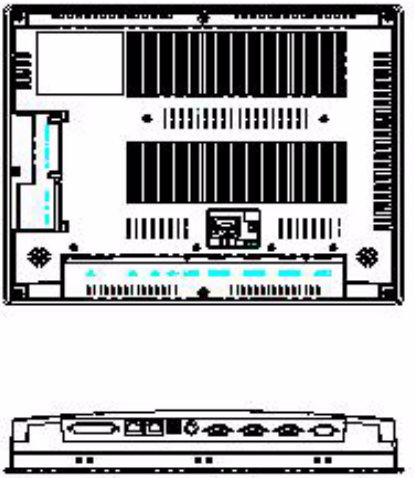

Figure 1.1: I/O port arrangement

1.7 Panel Mounting

1. There is a piece of adhesive waterproof gasket on the Mg-AL front bezel. Make sure the waterproof gasket is in position before installing the TPC-1570H to the panel opening.
2. Install the TPC-1570H to the panel opening.
3. Find out the eight clampers and eight long screws in the accessory pack. Hook those clampers to those holes around the four sides of the bezel. Insert the screws to every clamper and fasten them. These screws will then push on the mounting panel and fix the unit.
4. The mounting panel thickness is suggested to be less than 10mm (0.236 inch).

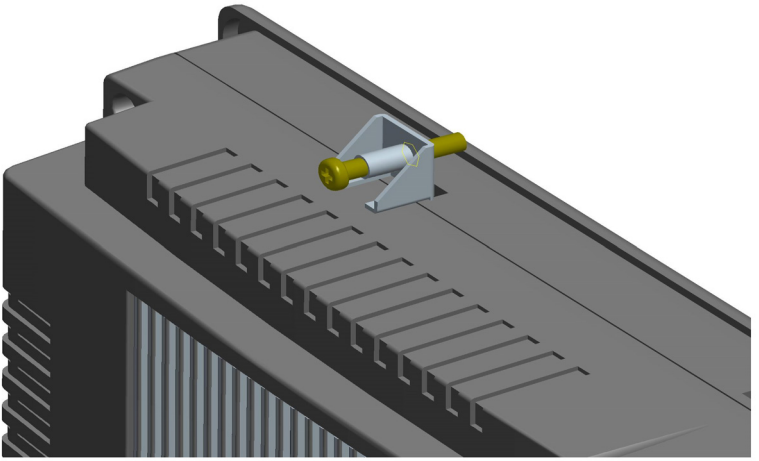

Figure 1.2: Panel Mounting

1.8 Exploded Diagram

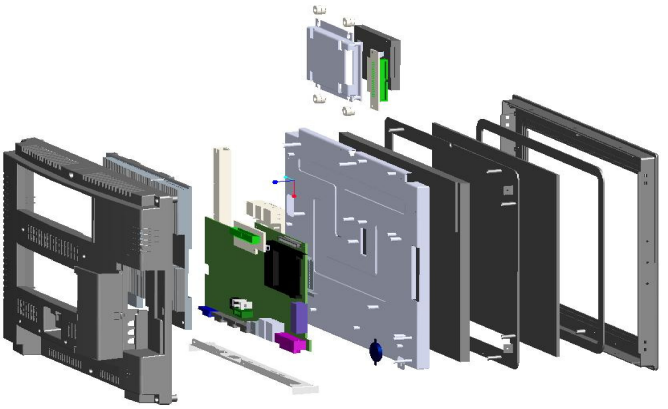

Figure 1.3: Exploded Diagram

1.9 Dimensions and cutout

Weight: 5 Kg (without HDD)

Dimensions: 383 x 307 x 64.5 mm (WxHxD)

Cutout: 374.5 x 298.5 mm (suggested)

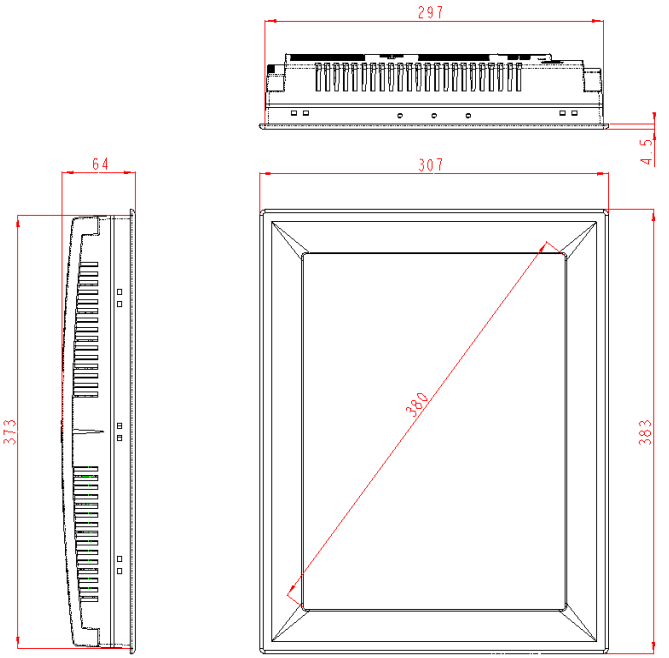

Figure 1.4: Dimensions

CHAPTER 2

System Setup

Chapter 2 System Setup

This chapter provides a brief explanation for operating the TPC-1570H. It is easy to make the TPC-1570H start working with the below step-by-step.

Step 1: Unpack the TPC-1570H package. Please check the packing list at the beginning of this manual.

Figure 2.1: Unpack the package

Step 2: Install a CompactFlash containing windows CE, embedded Windows XP or other operating system.

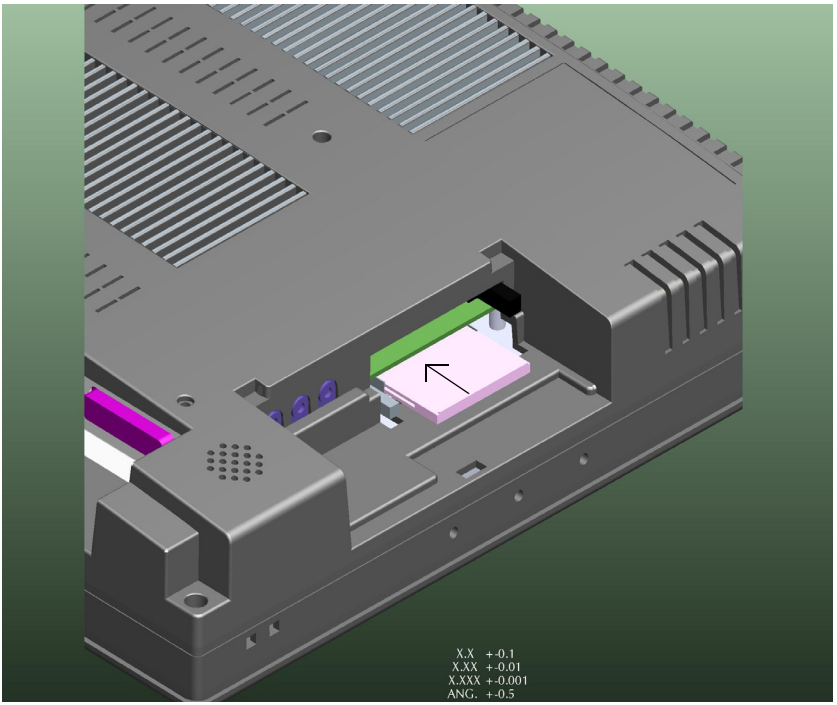

Figure 2.2: Install CompactFlash memory card

Warning	*It is suggested to turn OFF system power as plug in or pull out the memory card, though the Compact-Flash memory is supposed to be hot swappable.*

Step 3: Connect the power connector to the 24VDC power lines. The power lines can either be of some power adapter or in-house power source.

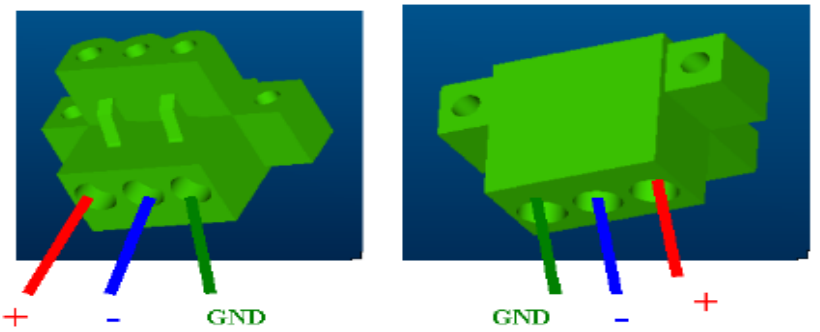

Figure 2.3: Power connector

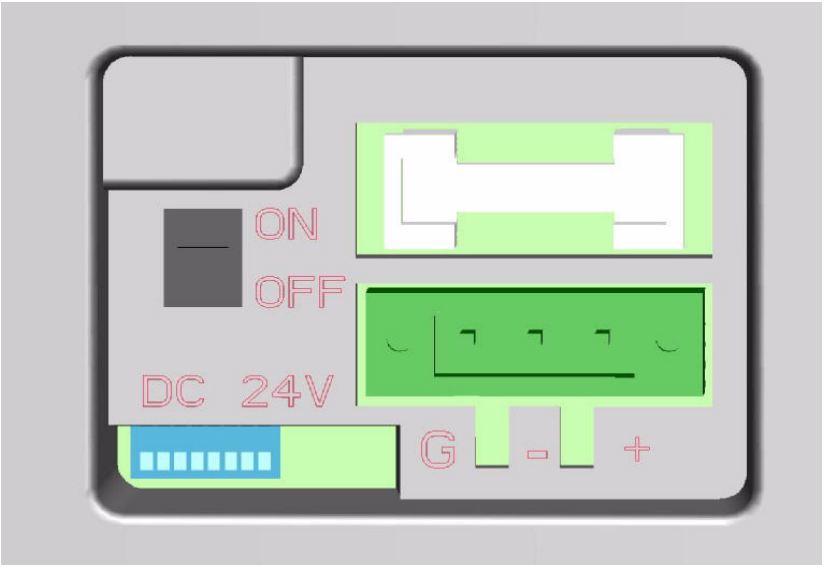

Figure 2.4: Power receptor and button pin assignments

Step 4: Plug the power lines to the system power receptor.

Step 5: Push the power button to power on the system as the figure 2.4.

Step 6: Calibrate the touchscreen. Please go to *"Start"→"Programs"→"PenMount DMC9000 Utilities"->"Control Panel"* as the figure 2.5. Then, click the tab "Calibrate" to calibrate by selecting the standard calibration or advanced calibration.

If your operating system is Windows CE, the details of the procedure are described in following section.

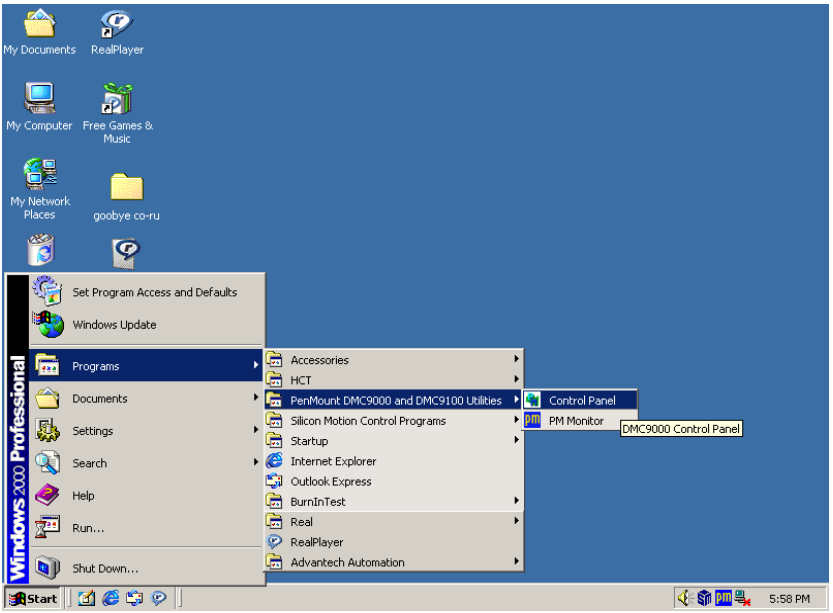

Figure 2.5: Touchscreen Calibration - 1

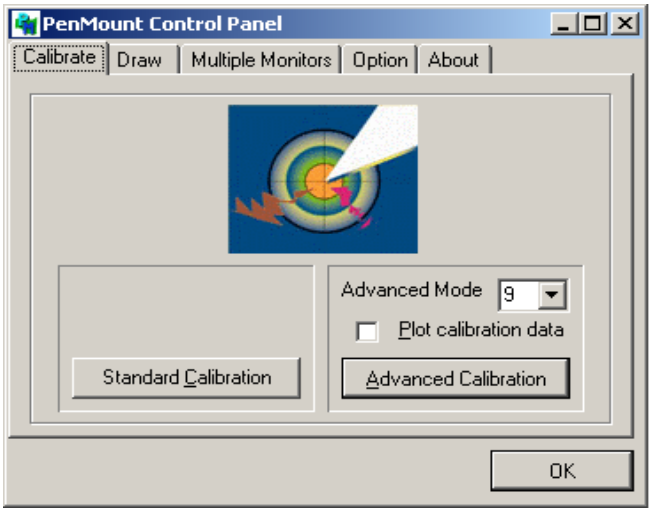

Figure 2.6: Touchscreen Calibration - 2

CHAPTER 3

System Engine

Chapter 3 System Engine

Main Board Connector and Jumper Setting List

Label	Function	Description
CN1	VGA	D-Sub 15-pin (Female) on panel.
CN2	DC IN	DC Power in Connector (HOUSING 5.08 MM 3P)
CN3	PCMCIA	One Slot PCMCIA connector
CN4	LCD POWER	LCD INVERTER Connector
CN5	PS2	Standard Mini-DIN 6-pin support K/B and Mouse on panel.
CN7	USB	Two USB Type-A Female to on panel.
CN9	IDE	Internal IDE 44pin(2mm) connector
CN10	PRT	D-Sub 25-pin (Female) on panel.
CN11	CF	CompactFlash socket
CN12	SPEAKER OUT	Internal Speaker Connector
CN13	MIC IN	Audio MIC IN
CN14	LINE OUT	Audio Line OUT
CN15	LINE IN	Audio Line IN
CN16 * (JP1)	LVDS LCD	Internal 18bit LVDS LCD Connector
CN17 * (JP3)	TOUCH	Internal Touchscreen Connector
COM1	COM1	Serial port:COM1 RS232
COM3	COM3	Serial port:COM3 RS232
COM4	COM4	Serial port:COM4 RS232/422/485
S1	COM4 MODE1	Setting COM4 RS232/422/485 mode
S2	COM4 MODE2	Setting COM4 RS422 Master or Slave mode
JP4	CLEAR CMOS	CLEAR CMOS
SW1	POWER SWITCH	System Power Switch

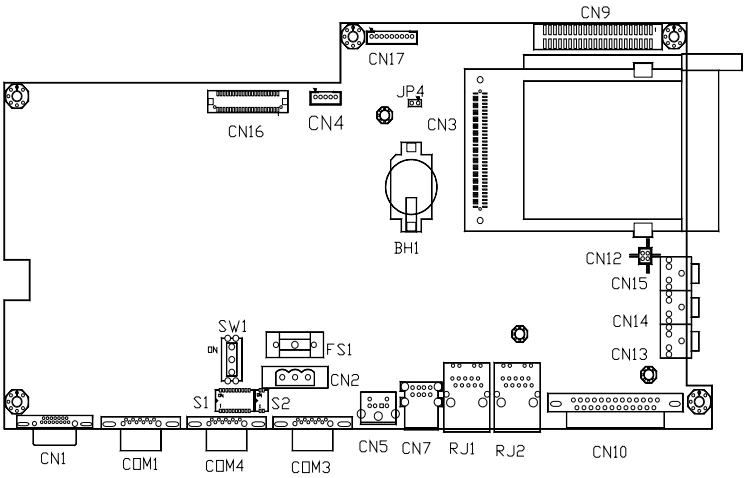

Figure 3.1: Main Board Connector -1

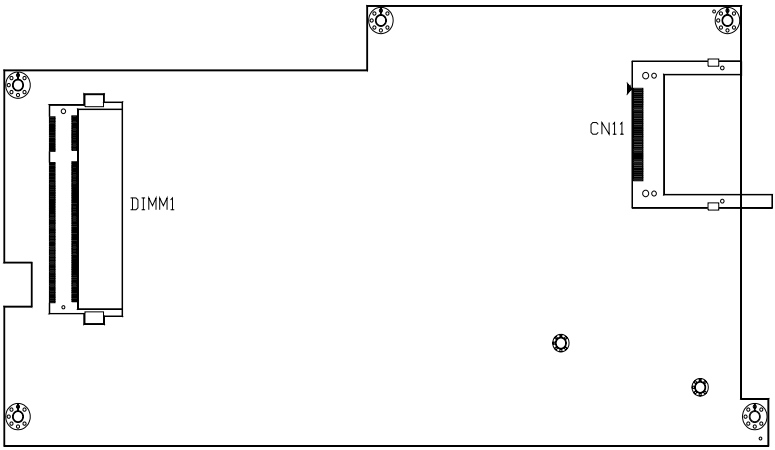

Figure 3.2: Main Board Connector -2

CHAPTER 4

Software Configuration

Sections include:

- Utilities & Drivers
- Advantech COM Driver Installation
- Watchdog Timer Driver Installation
- Dual Display Setting

Chapter 4 Software Configuration

A support CD-ROM for TPC-1570H is available and along with the product. There are related utilities and drivers for TPC-1570H included. Please install the Chipset INF driver, VGA graphics driver, LAN driver, audio driver, Advantech.com driver, Touchscreen driver and Watchdog Timer (WDT) driver sequentially.

4.1 Utilities & Drivers

The following utilities and drivers are provided for TPC-1570. You can also find the updated utilities and drivers from the support website.

4.1.1 Intel Chipset Software Installation Utility

Path: \INF

Available for the OS's below:

- Microsoft Windows 98 SE
- Microsoft Windows 2000
- Microsoft Windows XP

4.1.2 VGA Drivers (Intel(R) Graphics Driver)

Path: \VGA

Available for the OS's below:

- Microsoft Windows 98 SE
- Microsoft Windows 2000
- Microsoft Windows XP

4.1.3 Intel PRO Network Drivers/software

Path: \Lan

Available for the OS's below:

- Microsoft Windows 98 SE
- Microsoft Windows 2000
- Microsoft Windows XP

4.1.4 Audio Driver

Path: \ audio

Available for the OS's below:

- Microsoft Windows 98 SE
- Microsoft Windows 2000
- Microsoft Windows XP

4.1.5 Advantech COM Driver

**Path: \ Advantech com **

Available for the OS's below:

- Microsoft Windows 98 SE
- Microsoft Windows 2000
- Microsoft Windows XP

4.1.6 Touchscreen Driver

**Path: \ Pen mount **

Available for the OS's below:

- Microsoft Windows 98 SE
- Microsoft Windows 2000
- Microsoft Windows XP

4.1.7 Watchdog Timer Driver

Path: \Driver\WDT\W8362x

Available for the OS's below:

- Microsoft Windows 2000
- Microsoft Windows XP

4.2 Advantech COM Driver Installation

A com port named COM3 or COM4 on TPC-1570 is Advantech Special com port. Please follow the steps below to install the driver.

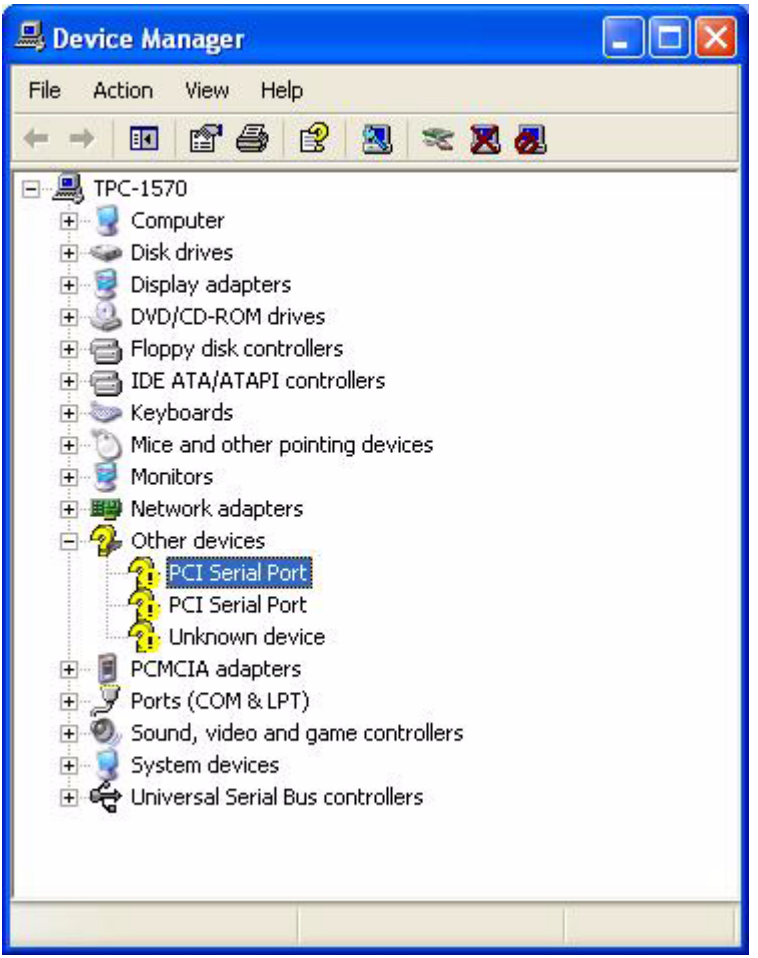

Step 1: Insert the companion CD-ROM into your CD-ROM drive. Open the directory: \ advantech com\

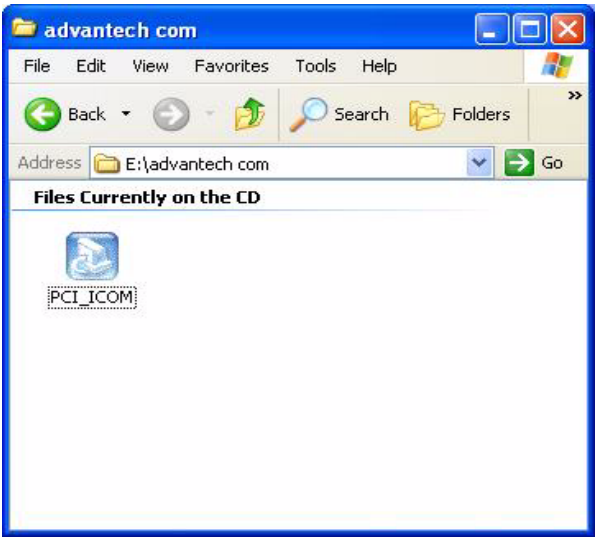

Step 2: Use Windows Explorer (or Windows Run command) to execute PCI_ICOM.EXE from the companion CD-ROM.

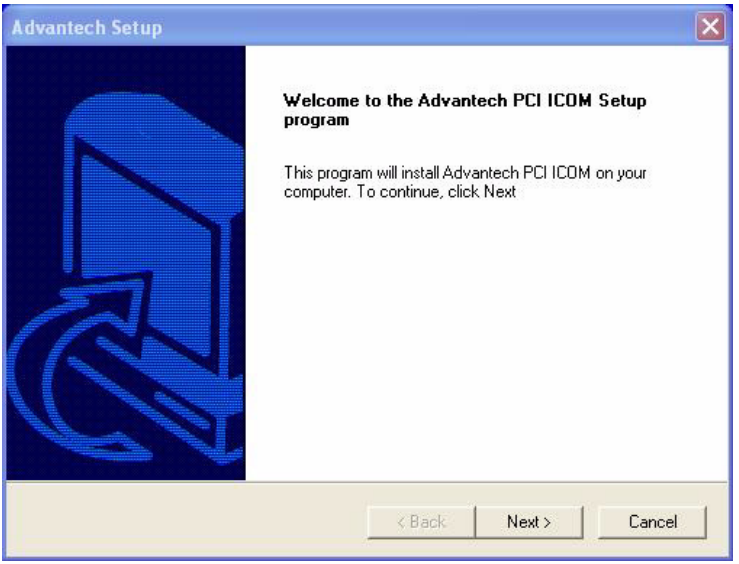
Advantech Setup
Welcome to the Advantech PCI ICOM Setup program
This program will install Advantech PCI ICOM on your computer. To continue, click Next
< Back
Next >
Cancel

Step 3: Click ***Next*** to continue installation.

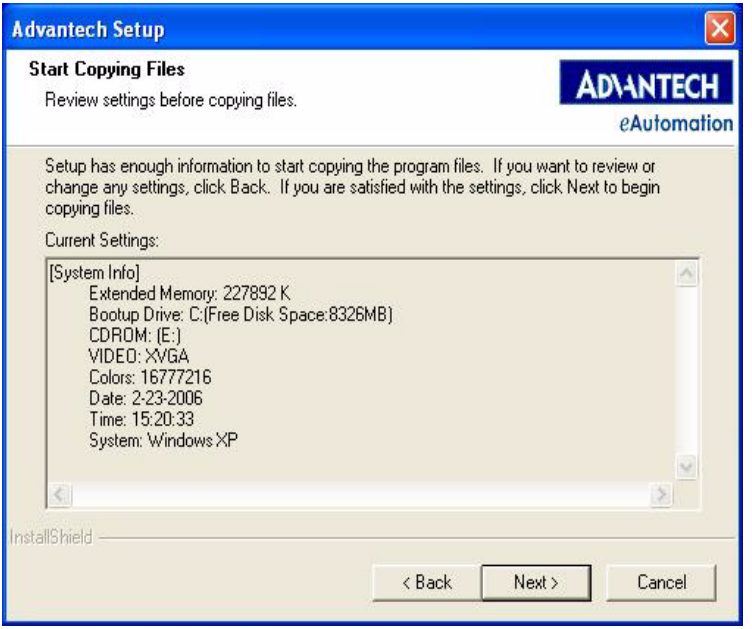
Advantech Setup
Start Copying Files
Review settings before copying files.
ADVANTECH
eAutomation
Setup has enough information to start copying the program files. If you want to review or change any settings, click Back. If you are satisfied with the settings, click Next to begin copying files.
Current Settings:
[System Info]
Extended Memory: 227892 K
Bootup Drive: C:(Free Disk Space:8326MB)
CDROM: (E:)
VIDEO: XVGA
Colors: 16777216
Date: 2-23-2006
Time: 15:20:33
System: Windows XP
InstallShield
< Back
Next >
Cancel

Step 4: Click ***Next*** to continue installation.

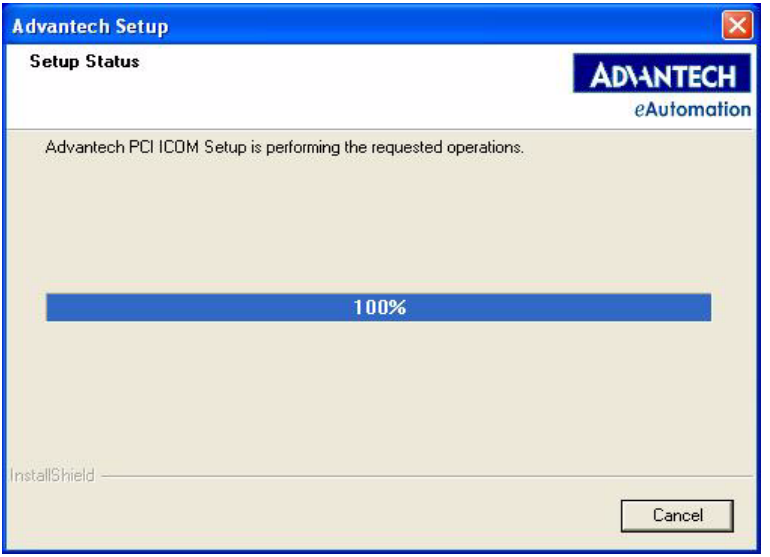

Step 5: Click ***uninstall icon*** to remove ?PCI Serial Port

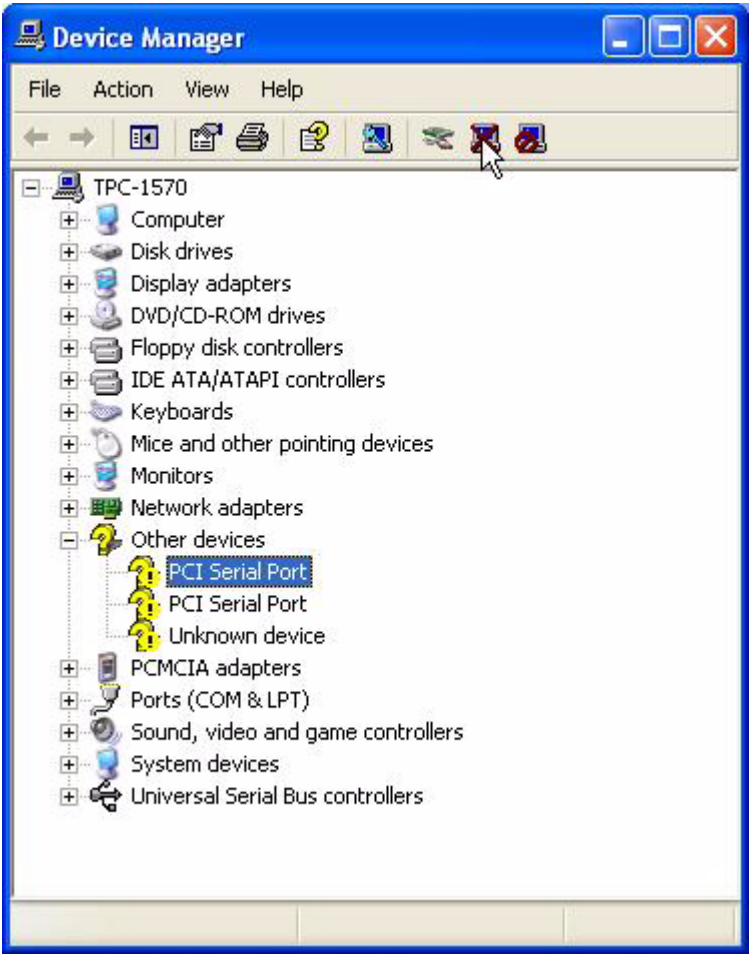

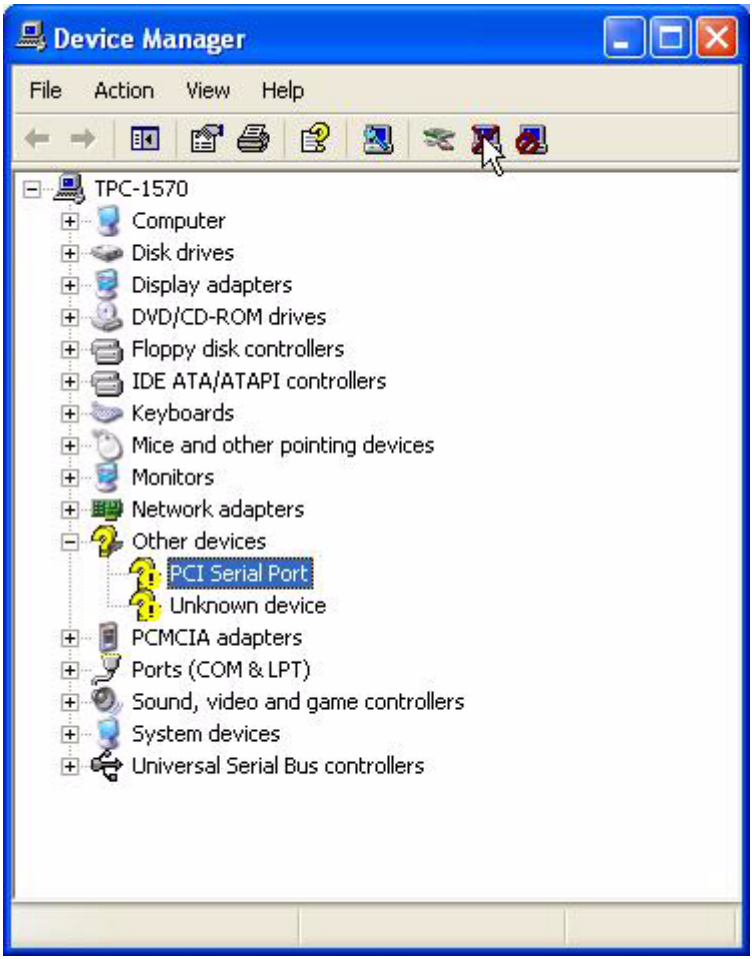

Step 6: Click the ***scan for hardware changes*** icon to remove ?PCI Serial Port

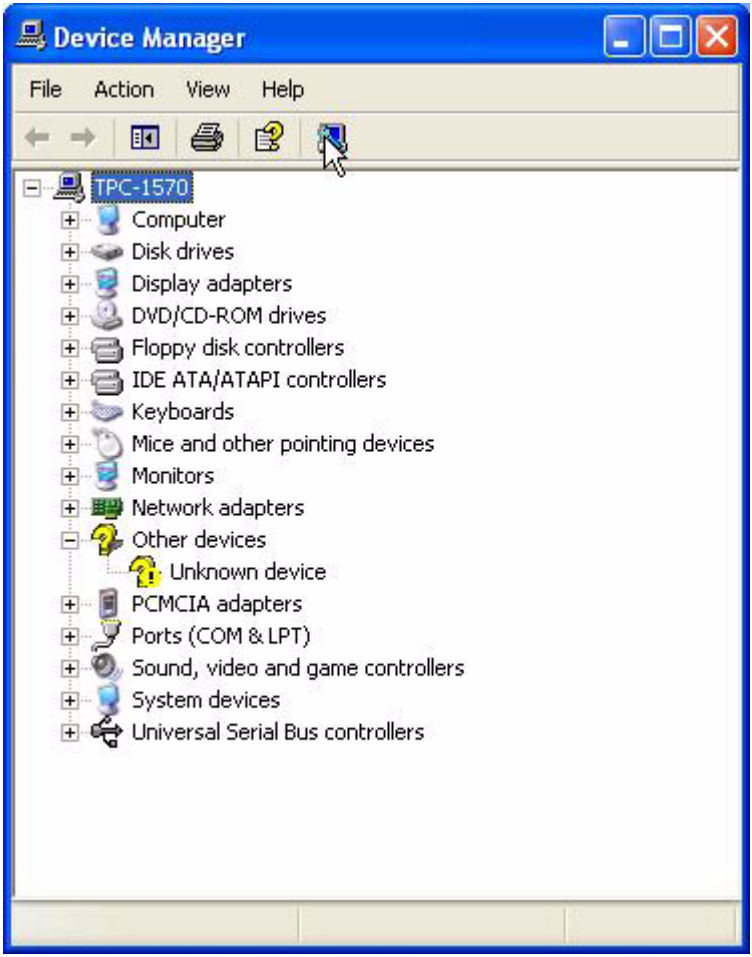
Device Manager
File
Action
View
Help
TPC-1570
Computer
Disk drives
Display adapters
DVD/CD-ROM drives
Floppy disk controllers
IDE ATA/ATAPI controllers
Keyboards
Mice and other pointing devices
Monitors
Network adapters
Other devices
Unknown device
PCMCIA adapters
Ports (COM & LPT)
Sound, video and game controllers
System devices
Universal Serial Bus controllers

Step 7: Found New Hardware and Click ***Next*** to continue installation.

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
Advantech PCI-1602 Series Master Bridge
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Step 8: Click ***Finish the Advantech PCI Serial Port*** to continue.

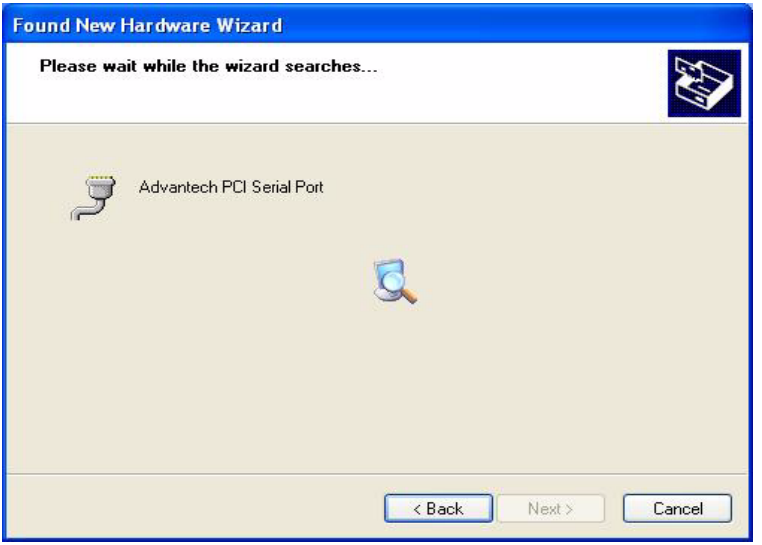

Step 9: Then, found New Hardware and Click ***Next*** to continue.

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
Advantech PCI-1602 Series Slave Bridge
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Step 10: Click Finish the Advantech PCI-1602 Serial SlaveBridge to continue installation.

Found New Hardware Wizard
Completing the Found New Hardware Wizard
The wizard has finished installing the software for:
Advantech PCI-1602 Series Slave Bridge
Click Finish to close the wizard.
< Back
Finish
Cancel

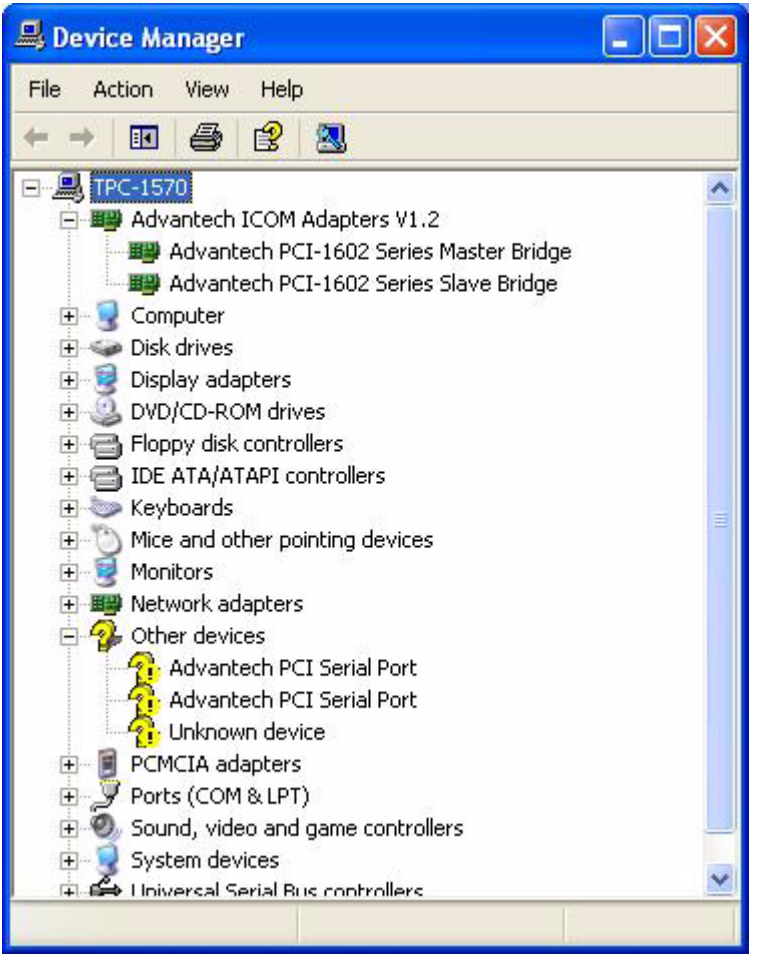

Step 11: Found New Hardware and Click ***Next*** to continue installation.

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
Advantech PCI Serial Port
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Step 12: Click ***Finish the Advantech PCI Serial Port*** to continue.

Found New Hardware Wizard
Completing the Found New Hardware Wizard
The wizard has finished installing the software for:
Advantech PCI Serial Port
Click Finish to close the wizard.
< Back
Finish
Cancel

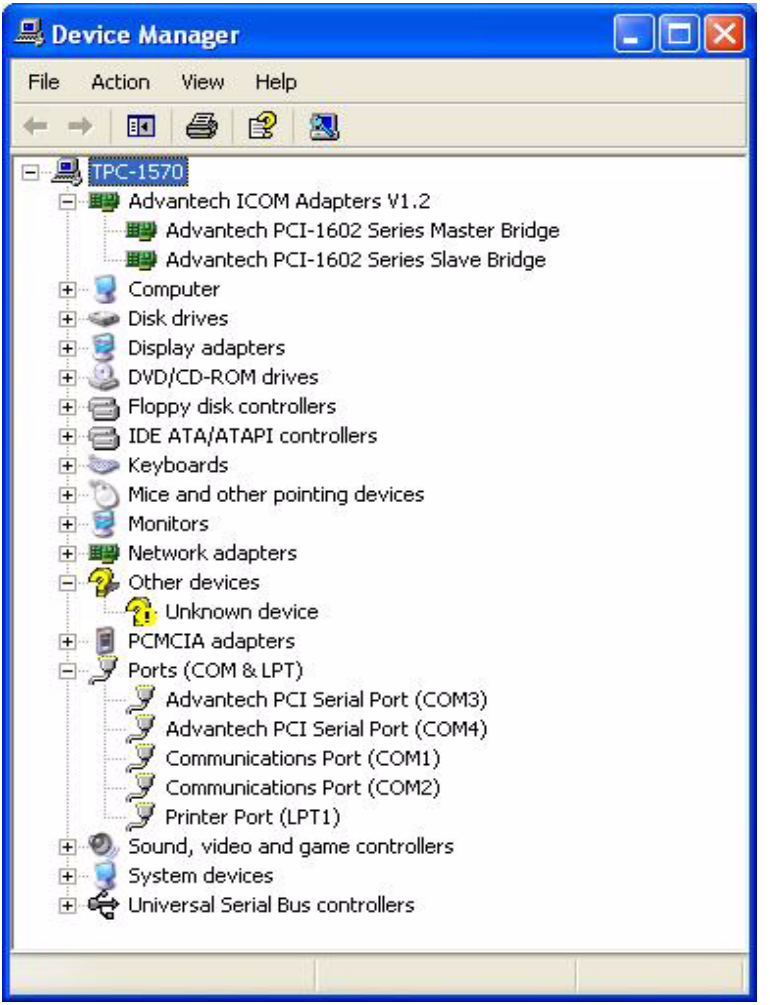

4.3 Watchdog Timer (WDT) Driver Installation

In order to ensure reliable and fail-safe performance, TPC-1570H has a built-in Watchdog Timer to handle unexpected system failures. TPC-1570H provides the drivers and a utility to activate and configure the timer for Windows2000/XP operating systems. The following is a brief introduction, using Windows2000 as an example, for the installation and configuration procedures.

4.3.1 Installing the TPC-1570 Watchdog Timer Driver

Step 1: Insert the companion CD-ROM into your CD-ROM drive. Open the directory: \WDT\8362x\W2K_XP.

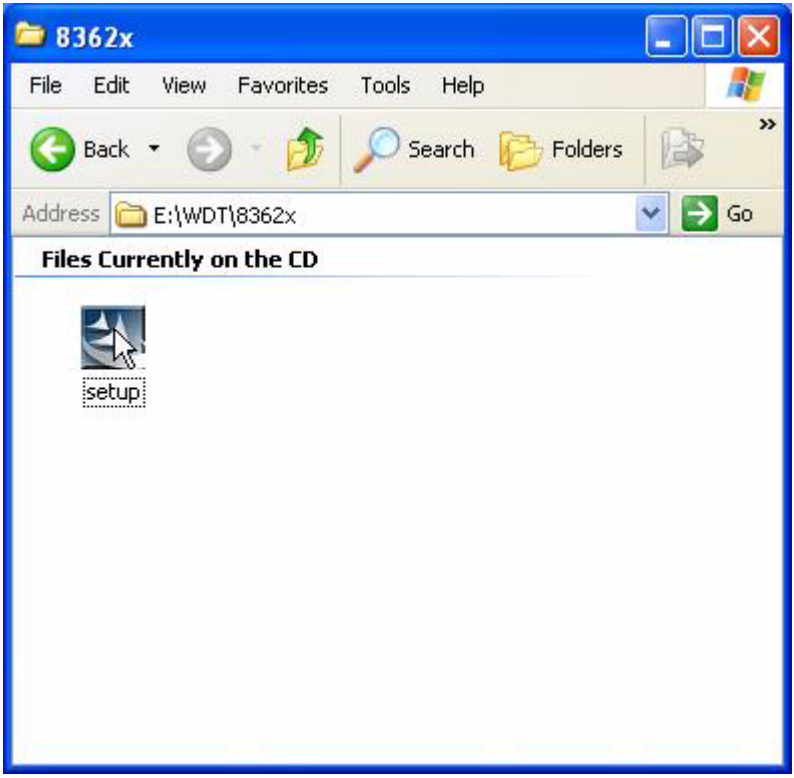

Step 2: Use Windows Explorer (or Windows Run command) to execute SETUP.EXE from the companion CD-ROM.

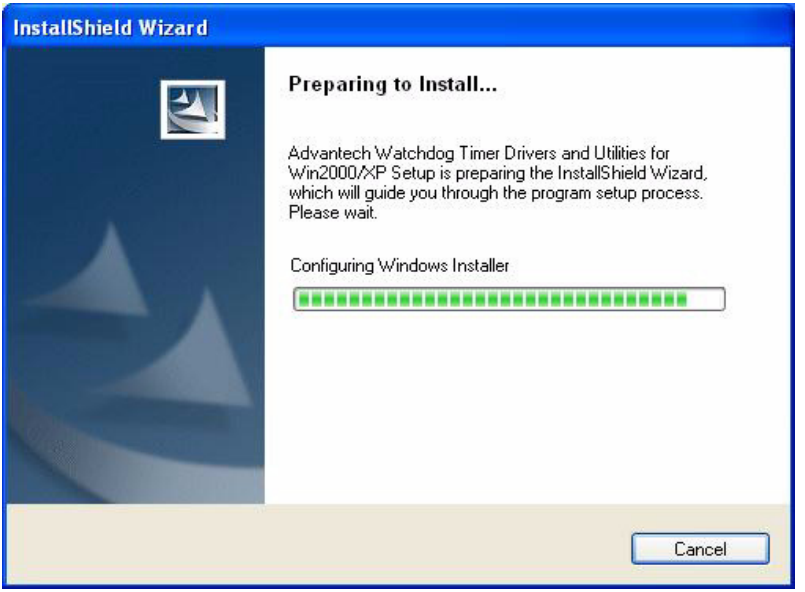
InstallShield Wizard
Preparing to Install...
Advantech Watchdog Timer Drivers and Utilities for Win2000/XP Setup is preparing the InstallShield Wizard, which will guide you through the program setup process. Please wait.
Configuring Windows Installer
Cancel

Step 3: Click Next to proceed.

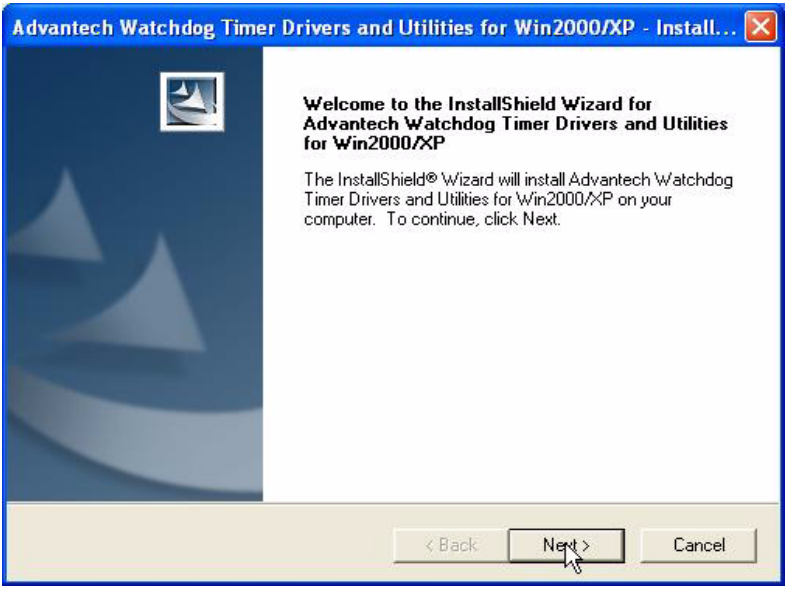
Advantech Watchdog Timer Drivers and Utilities for Win2000/XP - Install...
Welcome to the InstallShield Wizard for Advantech Watchdog Timer Drivers and Utilities for Win2000/XP
The InstallShield® Wizard will install Advantech Watchdog Timer Drivers and Utilities for Win2000/XP on your computer. To continue, click Next.
< Back
Next >
Cancel

Step 4: Click Next to confirm the customer information.

Step 5: Select Advantech [W83627HF] Watchdog Timer and click Next.

.

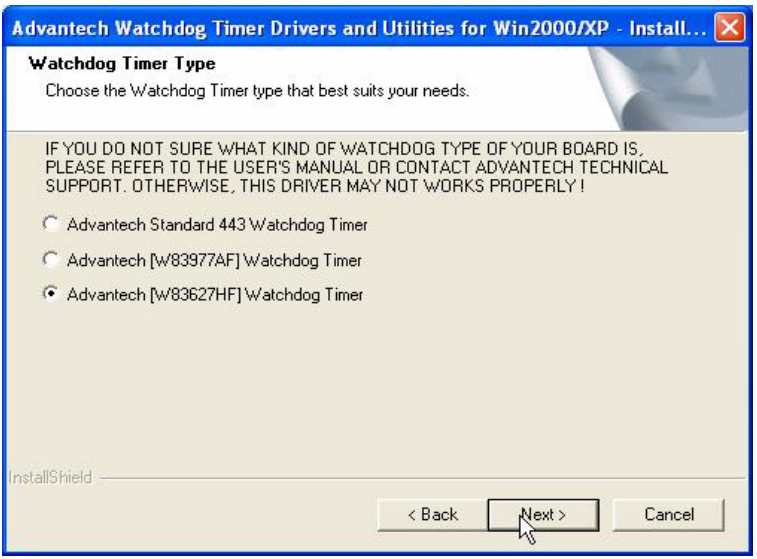
Advantech Watchdog Timer Drivers and Utilities for Win2000/XP - Install...
Watchdog Timer Type
Choose the Watchdog Timer type that best suits your needs.
IF YOU DO NOT SURE WHAT KIND OF WATCHDOG TYPE OF YOUR BOARD IS, PLEASE REFER TO THE USER'S MANUAL OR CONTACT ADVANTECH TECHNICAL SUPPORT. OTHERWISE, THIS DRIVER MAY NOT WORKS PROPERLY !
Advantech Standard 443 Watchdog Timer
Advantech [W83977AF] Watchdog Timer
Advantech [W83627HF] Watchdog Timer
InstallShield
< Back
Next >
Cancel

Step 6: Click Next to confirm selecting the Typical setup type.

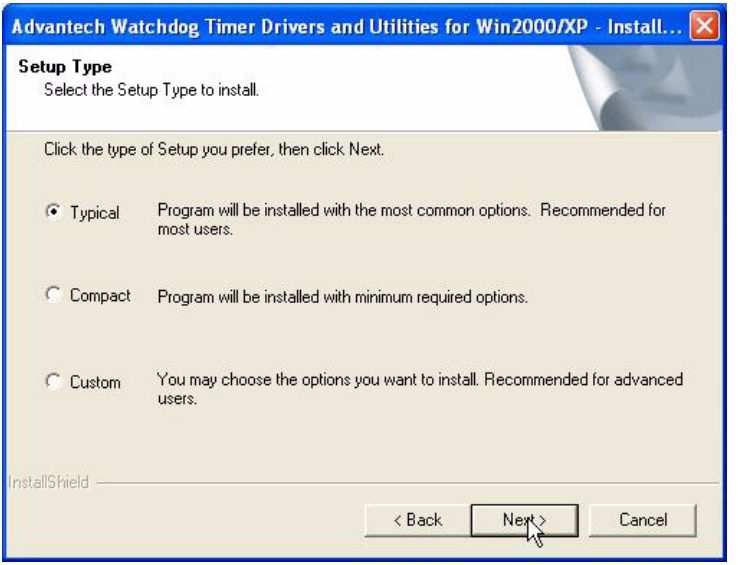
Advantech Watchdog Timer Drivers and Utilities for Win2000/XP - Install...
Setup Type
Select the Setup Type to install.
Click the type of Setup you prefer, then click Next.
Typical
Program will be installed with the most common options. Recommended for most users.
Compact
Program will be installed with minimum required options.
Custom
You may choose the options you want to install. Recommended for advanced users.
InstallShield
< Back
Next >
Cancel

Step 7: Click Next to proceed.

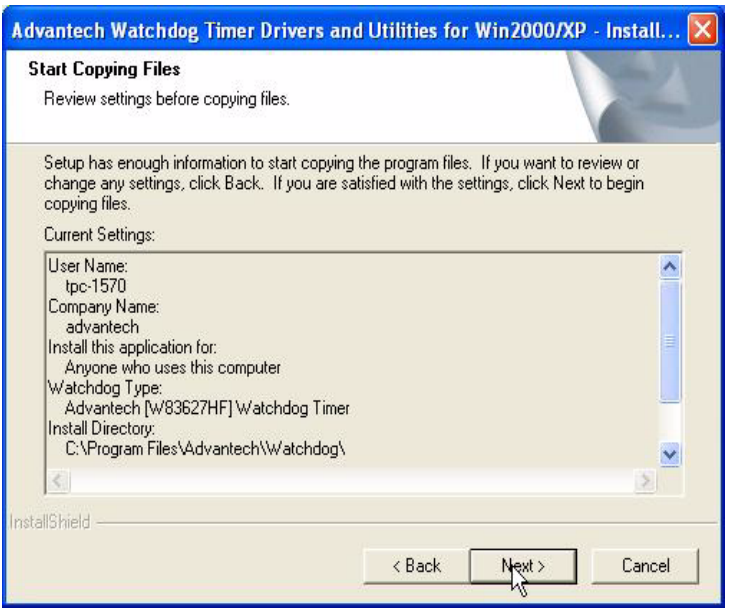
Advantech Watchdog Timer Drivers and Utilities for Win2000/XP - Install...
Start Copying Files
Review settings before copying files.
Setup has enough information to start copying the program files. If you want to review or change any settings, click Back. If you are satisfied with the settings, click Next to begin copying files.
Current Settings:
User Name:
tpc-1570
Company Name:
advantech
Install this application for:
Anyone who uses this computer
Watchdog Type:
Advantech [W83627HF] Watchdog Timer
Install Directory:
C:\Program Files\Advantech\Watchdog\
InstallShield
< Back
Next >
Cancel

Step 8: Click Finish to complete the procedure.

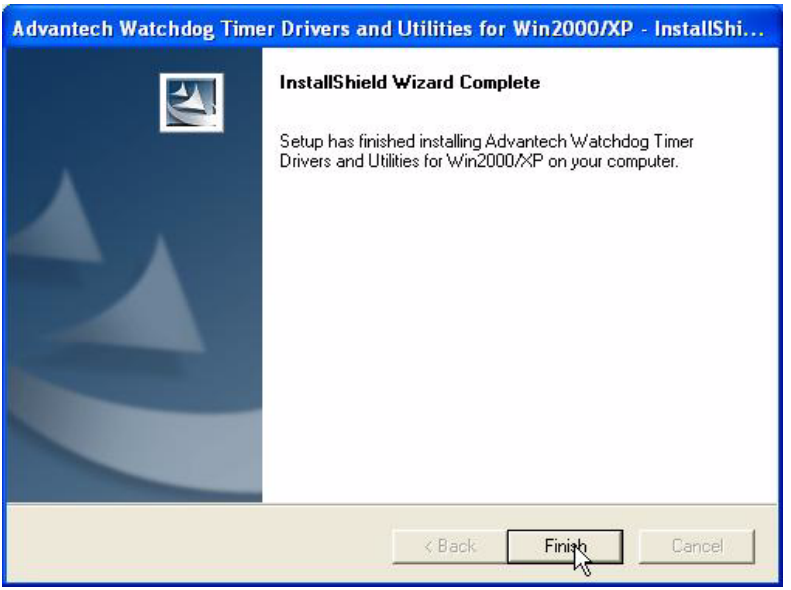
Advantech Watchdog Timer Drivers and Utilities for Win2000/XP - InstallShi...
InstallShield Wizard Complete
Setup has finished installing Advantech Watchdog Timer Drivers and Utilities for Win2000/XP on your computer.
< Back
Finish
Cancel

Step 9: Click OK to restart the system and activate the Watchdog Timer.

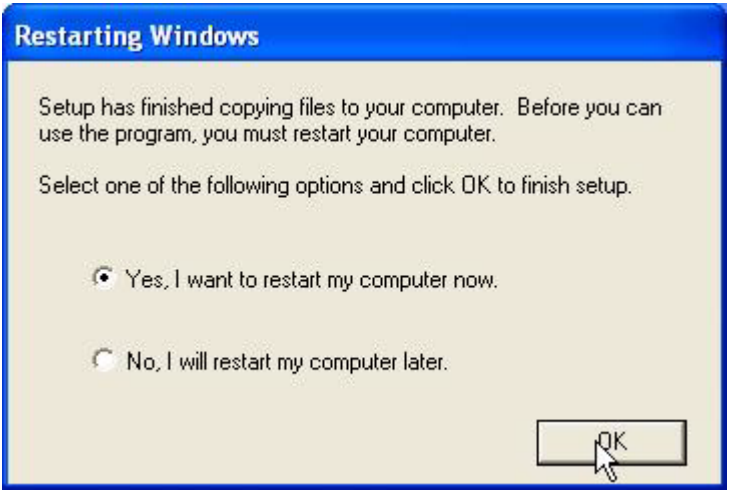
Restarting Windows
Setup has finished copying files to your computer. Before you can use the program, you must restart your computer.
Select one of the following options and click OK to finish setup.
Yes, I want to restart my computer now.
No, I will restart my computer later.
OK

4.3.2 How to Use the TPC-1570H Watchdog Timer

Step 1: Open the Control Panel and click Watchdog Service Configuration.

Step 2: Click the Start Service button.

Step 3: Click Setting to select the setting page.

Step 4: Select the Timer Span that meets your application requirement.

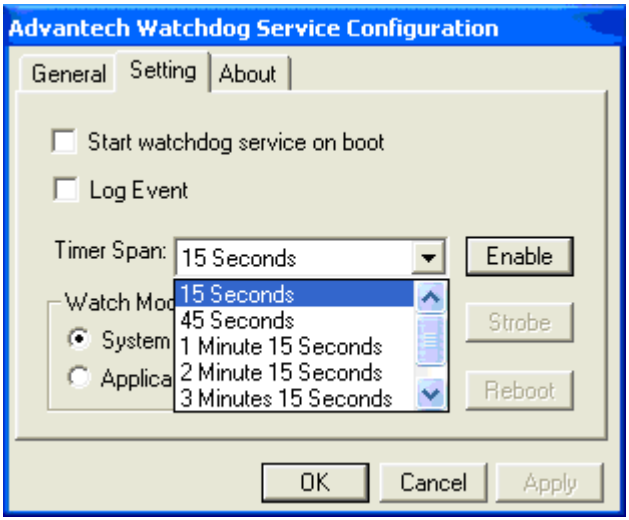

Step 5: Click Enable to enable the setting.

Step 6: Check the Start watchdog service on boot to enable the Watchdog timer to start automatically after the system boots every time.

Step 7: Click OK, then the configuration procedure is finished.

Note	*Use Advantech WDT Driver.WDT was enable,and WDT LED was 1Hz glisten.*

4.4 Dual Display Setting

If you use CRT monitor, you must Connections to CRT port in during system boot up. During system boot up, the system will set CRT parameter. If you have multiple devices, you can set them.

Step 1: Click Intel graphic icon from the toolbars

Step 2: Select Graphics Options -> Output Device

Step 3: This control allows selection of a device page. The currently active is indicated by a checkmark on the icon. If you have multiple devices, activation of an alternate device is accomplished by selecting that device icon. Then, select either Apply or OK button. Intel Dual Display Clone is for CRT monitor and TPC-1570 LCD as the below.

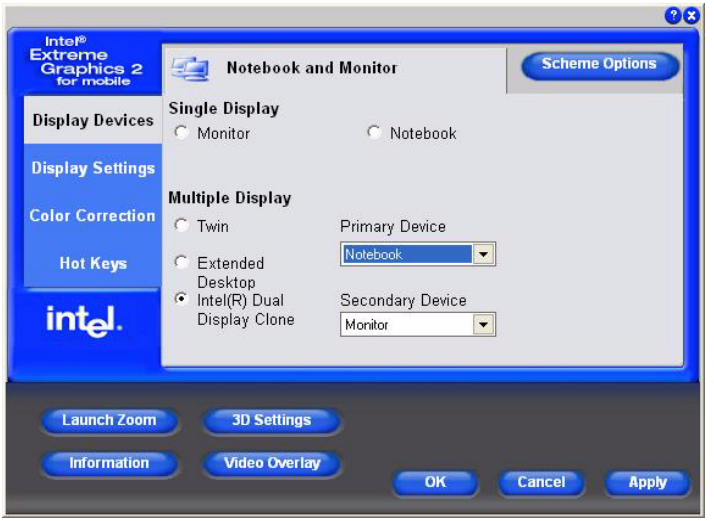

CHAPTER 5

Windows XP Embedded

Sections include:

- EWF
- HORM
- Advantech Utilities

Chapter 5 Windows XP Embedded

TPC-1570H is in support of embedded windows platform. This section is to state the important features, EWF and HORN, provided in windows XP embedded.

5.1 EWF

EWF stands for Enhanced Write Filter. It provides an upper filter in the storage device driver stack that redirects disk write operations to volatile (RAM) or non-volatile (disk) storage. EWF protects a volume from write access. The benefits are as the following.

Write-protect one or more partitions on your system.

Enable read-only media, such as CD-ROM or flash, to boot and run.

Prolong the lifespan of write-sensitive storage, such as CompactFlash.

TPC-1570H XPE provides EWF RAM RDG mode on system partition. All wirte to system partition will be redirected to RMA once this mode is enabled. This mode is manually enabled by customers after they finish all their changes on system such as installing their applications or adjusting system setting.

Advantech provides a pair of utilities to operate EWF, OSLock and OSUnLock. The setting is stated in the section later.

5.2 HORM

HORM stands for Hibernate Once Resume Many. In HORM environment, a single hibernation file is used to boot the system repeatedly. To set a HORM environment, please follow the steps below.

Please make sure EWF is disabled. You can run OSUnLock to disable EWF.

Enable hibernation support:
Run ‘power options’ in control panel, and then select ‘Enable Hibernation’ in hibernation pane.

Enable EWF:
Run OSLock, and then system reboot automatically.

Open those software that customers want to directly use after system resume from hibernation.

Hibernate via Advantech HORM utility:
Please Click Start Menu->All Programs->Advantech->HORM

HORM environment remains all along unless the following events occur:

Run EWF commit command (ewfmgr c: -commit) and then reboot system.

Select “Discard hibernation file” by clicking F8 when system is starting up

Also, HORM cannot fit your system if free space in C partition is not enough. The hibernation file required is dependent on the RAM size you use on the system. In other words, the hibernation file is 512MB that is the same as memory size used on TPC-1570H-A1 or TPC-1570H-B1.

5.3 Advantech Utilities

TPC-1570H provides the useful utilities for users to configure the HORM and EWF.

5.3.1 Version Information

Start menu-> All Programs -> Advantech

This states the current XPE runtime information including hardware platform, version, build number, release date, XPE QFEs installed in component database and XP Pro Patches you installed manually.

5.3.2 OSLock and OSUnLock

The two utilities assist users to enable or disable EWF. Please go to Start Menu-> All Programs-> Advantech. The default setting of EWF is disabled. Users can protect C partition from any disk writing via OSLock that is to enable EWF RAM REG Mode. In this mode, any changes on C

partition including modification on files or registry will be redirected to memory, thus these changes will be discarded in the next system startup.

To exit this environment is via OSUnLock. Please visit MSDN website for further information about EWF.

5.3.3 HORM

This is to create HORM environment. Please go to Start Menu-> All Programs-> Advantech. This utility firstly dismounts all local physical volumes that are not protected by EWF. It requires users to input the volume list.

Please follow the steps before running this utility to create full HORM environment.

Enable Hibernation via Power Options in Control Panel

Make C: partition EWF-enabled via OSLock

Make sure that all volumes to be dismounted are not in use.

APPENDIX A

Serial Port Settings

Appendix A Serial Port Settings

A.1 COM1/ COM3 Connector Definition



Pin	Signal
1	NDCD
2	NRX
3	NTX
4	NDTR
5	GND
6	NDSR
7	NRTS
8	NCTS
9	NRI

A.2 COM4 Setting

The serial port COM4 on the TPC-1570H is adjustable. It can be set to RS-232, RS-422 or RS-485. This port is designed with auto data flow control capability. In other word, the TPC-1570H can automatically detect the data flow direction at this port when the two wired RS-485 communication is activated.

Note: Default is RS-485

Note: The black square is dip direction.



COM4 Mode	S1 and S2 setting
RS-232 Mode	ON 
RS-485 Mode	ON 
RS-422 Master Mode	ON 
RS-422 Slave Mode	ON 

PIN	RS-232	RS-422	RS-485
1	NDCD	TX-	D-
2	NRX	TX+	D+
3	NTX	RX+	
4	NDTR	RX-	
5	GND	GND	GND
6	NDSR		
7	NRTS		
8	NCTS		
9	NRI		

APPENDIX B

Watchdog Timer on WinCE 5.0

Appendix B Watchdog Timer on WinCE

There is a built-in Watchdog timer on Windows CE 5.0 for TPC-1570H. You can access it through WIN32 API. TPC-1570H provides a WDT driver to allow users to enable/disable the Watchdog timer. The driver name is "WDT1:". Programmers must open this driver before using the resources. Then programmers can use DeviceIOControl functions to enable/disable Watchdog timer. The introduction below includes the DeviceIOControl, the definition of the parameter and an example.

B.1 DeviceIOControl

This function sends a control code directly to a specified device driver, causing the corresponding device to perform the specified operation.

BOOL DeviceIoControl(

HANDLE hDevice,

DWORD dwIoControlCode,

LPVOID lpInBuffer,

DWORD nInBufferSize,

LPVOID lpOutBuffer,

DWORD nOutBufferSize,

LPDWORD lpBytesReturned,

LPOVERLAPPED lpOverlapped);

Parameters:

hDevice
[in] Handle to the device that is to perform the operation. Call the Create-File function to obtain a device handle.

dwIoControlCode
[in] Specifies the control code for the operation. This value identifies the specific operation to be performed and the type of device on which the operation is to be performed. No specific values are defined for the dwIo-ControlCode parameter. However, the writer of a custom device driver can define IOCTL_XXXX control codes, per the CTL_CODE macro. These

control codes can then be advertised, and an application can use these control codes with DeviceIoControl to perform driverspecific functions.

lpInBuffer
[in] Long pointer to a buffer that contains the data required to perform the operation. This parameter can be NULL if the dwIoControlCode parameter specifies an operation that does not require input data.

nInBufferSize
[in] Size, in bytes, of the buffer pointed to by lpInBuffer.

lpOutBuffer
[out] Long pointer to a buffer that receives the operation.s output data. This parameter can be NULL if the dwIoControlCode parameter specifies an operation that does not produce output data.

nOutBufferSize
[in] Size, in bytes, of the buffer pointed to by lpOutBuffer.

lpBytesReturned
[out] Long pointer to a variable that receives the size, in bytes, of the data stored into the buffer pointed to by lpOutBuffer. The lpBytesReturned parameter cannot be NULL. Even when an operation produces no output data, and lpOutBuffer can be NULL, the DeviceIoControl function makes use of the variable pointed to bylpBytesReturned. After such an operation, the value of the variable is without meaning.

lpOverlapped
[in] Ignored; set to NULL.

Return Values
Nonzero indicates success. Zero indicates failure. To get extended error information, call GetLastError.

B.2 How to Use the Control Code

There are 6 control codes for the operation codes in the WDT driver.

IOCTL _WDT_ENABLE:

Enables the Watchdog timer on your application. By default, if the Watchdog timer is enabled, the WDT driver will automatically trigger itself after the specified period and your application does not need to trigger the Watchdog timer in this situation.

lpInBuffer : unused.

nInBufferSize: unused.

lpOutBuffer: unused.

nOutBufferSize: unused.

IOCTL _WDT_DISABLE:

Disables the Watchdog time on your application.

lpInBuffer : unsed.

nInBufferSize: unused.

lpOutBuffer: unused.

nOutBufferSize: unused.

IOCTL_WDT_STROBE:

Triggers the Watchdog. If your application uses IOCTL_WDT_ENABLE to enable the Watchdog first and then sends IOCTL_WDT_REBOOT to the WDT driver, your application must trigger the Watchdog once during the Watchdog timer period. If your application has not triggered at the specified period, the device will reboot automatically.

lpInBuffer: unused.

nInBufferSize: unused.

lpOutBuffer: unused.

nOutBufferSize: unused.

IOCTL_WDT_GETTIMEOUT:

Gets the Watchdog time setting.

lpInBuffer: unused.

nInBufferSize: unused.

lpOutBuffer: The DWORD pointer to your Watchdog time setting. The Watchdog time setting is just a number. 0 means 2 seconds, 1 means 5 seconds, 2 means 10 seconds, 3 means 15 seconds, 4 means 30 seconds, 5 means 45 seconds and 6 means 60 seconds. The default setting is 5 seconds.

nOutBufferSize: unused.

IOCTL_WDT_SETTIMEOUT:

Sets the Watchdog time setting.

lpInBuffer : The DWORD pointer to your Watchdog time setting. The Watchdog time setting is just a number. 0 means 2 seconds, 1 means 5 seconds, 2 means 10 seconds, 3 means 15 seconds, 4 means 30 seconds, 5 means 45 seconds and 6 means 60 seconds. The default setting is 5 seconds.

nInBufferSize:.unused.

lpOutBuffer: unused.

nOutBufferSize: unused.

IOCTL_WDT_REBOOT:

If you want your application to trigger the Watchdog by itself, please use IOCTL_WDT_REBOOT to notify the WDT driver. Otherwise, the WDT will trigger itself automatically.

lpInBuffer :unused.

nInBufferSize: unused.

lpOutBuffer: unused.

nOutBufferSize: unused.

B.3 Examples

```
#define WDT_CODE(ID)
CTL_CODE(FILE_DEVICE_UNKNOWN,ID,
METHOD_BUFFERED, FILE_ANY_ACCESS)
#define IOCTL_WDT_ENABLE WDT_CODE (0x900)
#define IOCTL_WDT_DISABLE WDT_CODE(0x901)
#define IOCTL_WDT_STROBE WDT_CODE(0x902)
#define IOCTL_WDT_GET_TIMEOUT WDT_CODE(0x903)
#define IOCTL_WDT_SET_TIMEOUT WDT_CODE(0x904)
#define IOCTL_WDT_REBOOT WDT_CODE(0x905)
// for compatibility reasons, you can define IOCTL as below:
// #define IOCTL_WDT_ENABLE 0x1001
// #define IOCTL_WDT_DISABLE 0x1002
// #define IOCTL_WDT_STROBE 0x1003
// #define IOCTL_WDT_GETTIMEOUT 0x1004
// #define IOCTL_WDT_SETTIMEOUT 0x1005
// #define IOCTL_WDT_REBOOT 0x1006
HANDLE m_hWDT=NULL;
TCHAR szClassName[60];
// assign the WDT driver name
wsprintf(szClassName, TEXT("WDT1:"));
// Open the WDT driver
m_hWDT = CreateFile(szClassName, GENERIC_READ
GENERIC_WRITE, 0, NULL, OPEN_EXISTING,
FILE_ATTRIBUTE_NORMAL, NULL);
if ( m_hWDT == INVALID_HANDLE_VALUE ) {
DebugMsg(CString("WDT driver fail"));
return;
}
DWORD dwTemp;
DWORD nIndex=2;
```

```
// Set the Watchdog Timer as 10 seconds. Number 2 means 10 seconds.
DeviceIoControl(m_hWDT, IOCTL_WDT_SET_TIMEOUT, &nIndex,
sizeof(nIndex), NULL, 0, &dwTemp, NULL);
// Enable the Watchdog timer
DeviceIoControl(m_hWDT, IOCTL_WDT_ENABLE, NULL, 0, NULL,
0, &dwTemp, NULL);
While (1) {
// do your job here.
Sleep(8000);
DeviceIoControl(m_hWDT, IOCTL_WDT_STROBE, NULL,0,
NULL, 0, &dwTemp, NULL);
}
DeviceIoControl(m_hWDT, IOCTL_WDT_DISABLE, NULL, , NULL,
0, &dwTemp, NULL);
CloseHandle(m_hWDT);
```

APPENDIX C

Watchdog Timer Programming

Appendix C Watchdog Timer Programming

C.1 Overview

The TPC-1570H cards' watchdog timer can be used to monitor system software operation and take corrective action if the software fails to function after the programmed period. This section describes the operation of the watchdog timer, and how to program it.

The watchdog timer is built into the super I/O controller W83627HF. It provides the following functions for user programming:

- Can be enabled and disabled by user's program.
- Timer can be set from 1 to 255 seconds or 1 to 255 minutes.
- Generates an interrupt or resets signal if the software fails to reset the timer after time-out.

C.2 Watchdog Timer Programming

The I/O port address of the watchdog timer is 2E(hex) and 2F(hex), 2E (hex) is the address port. 2F(hex) is the data port. You must first assign the address of register by writing address value into address port 2E(hex), then write/read data to/from the assigned register through data port 2F (hex).

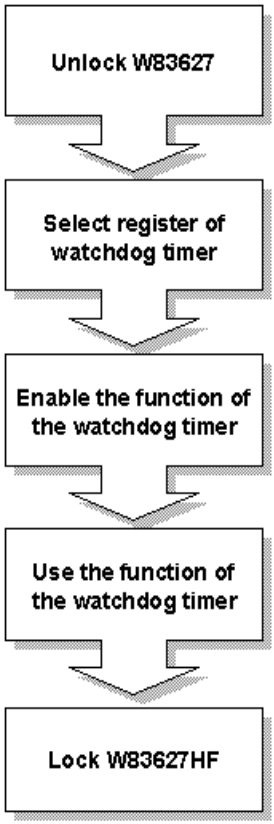
Unlock W83627
Select register of watchdog timer
Enable the function of the watchdog timer
Use the function of the watchdog timer
Lock W83627HF

Figure C.1: Watchdog timer programming procedure

Table C.1: Watchdog Timer Registers		
Address of register (2E)	**Attribute**	**Description**
Read/Write	Value (2F) and description	
87 (hex)	-----	Write this address to I/O address port 2E (hex) twice to unlock the W83627HF
07 (hex)	write	Write 08 (hex) to select register of watchdog timer.
30 (hex)	write	Write 01 (hex) to enable the function of the watchdog timer. Disabled is set as default.
F5 (hex)	write	Set seconds or minutes as units for the timer.
Write 0 to bit 3: set second as counting unit. [default]		
Write 1 to bit 3: set minute as counting unit		
F6 (hex)	write	0: stop timer [default]01~FF (hex): The amount of the count, in seconds or minutes, depends on the value set in register F5 (hex). This number decides how long the watchdog timer waits for strobe before generating an interrupt or reset signal. Writing a new value to this register can reset the timer to count with the new value.
F7 (hex)	rd/wr	Bit 6: Write 1 to enable keyboard to reset the timer, 0 to disable.[default] Bit 5: Write 1 to generate a timeout signal immediately and automatically return to 0. [default=0] Bit 4: Read status of watchdog timer, 1 means timer is "time out".
AA (hex)	-----	Write this address to I/O port 2E (hex) to lock the watchdog timer.2

C.3 Example Programs

1. Enable watchdog timer and set 10 sec. as timeout interval

```
;--------------------------------------------------------
Mov dx,2eh ; Unlock W83627HF
Mov al,87h
Out dx,al
Out dx,al
;--------------------------------------------------------
Mov al,07h ; Select registers of watchdog timer
Out dx,al
Inc dx
Mov al,08h
Out dx,al
;--------------------------------------------------------
Dec dx ; Enable the function of watchdog timer
Mov al,30h
Out dx,al
Inc dx
Mov al,01h
Out dx,al
;--------------------------------------------------------
Dec dx ; Set second as counting unit
Mov al,0f5h
Out dx,al
Inc dx
In al,dx
And al,not 08h
Out dx,al
;--------------------------------------------------------
Dec dx ; Set timeout interval as 10 seconds and start counting
Mov al,0f6h
```

```
Out dx,al
Inc dx
Mov al,10
Out dx,al
;--------------------------------------------------------
Dec dx ; lock W83627HF
Mov al,0aah
Out dx,al
```

2. Enable watchdog timer and set 5 minutes as timeout interval

```
;--------------------------------------------------------
Mov dx,2eh ; unlock W83627H
Mov al,87h
Out dx,al
Out dx,al
;--------------------------------------------------------
Mov al,07h ; Select registers of watchdog timer
Out dx,al
Inc dx
Mov al,08h
Out dx,al
;--------------------------------------------------------
Dec dx ; Enable the function of watchdog timer
Mov al,30h
Out dx,al
Inc dx
Mov al,01h
Out dx,al
;--------------------------------------------------------
Dec dx ; Set minute as counting unit
Mov al,0f5h
```

```
Out dx,al
Inc dx
In al,dx
Or al,08h
Out dx,al
;--------------------------------------------------------
Dec dx ; Set timeout interval as 5 minutes and start counting
Mov al,0f6h
Out dx,al
Inc dx
Mov al,5
Out dx,al
;--------------------------------------------------------
Dec dx ; lock W83627HF
Mov al,0aah
Out dx,al
```

3. Enable watchdog timer to be reset by mouse

```
;--------------------------------------------------------
Mov dx,2eh ; unlock W83627H
Mov al,87h
Out dx,al
Out dx,al
;--------------------------------------------------------
Mov al,07h ; Select registers of watchdog timer
Out dx,al
Inc dx
Mov al,08h
Out dx,al
;--------------------------------------------------------
Dec dx ; Enable the function of watchdog timer
```

```
Mov al,30h
Out dx,al
Inc dx
Mov al,01h
Out dx,al
;--------------------------------------------------------
Dec dx ; Enable watchdog timer to be reset by mouse
Mov al,0f7h
Out dx,al
Inc dx
In al,dx
Or al,80h
Out dx,al
;--------------------------------------------------------
Dec dx ; lock W83627HF
Mov al,0aah
Out dx,al
```

4. Enable watchdog timer to be reset by keyboard

```
;--------------------------------------------------------
Mov dx,2eh ; unlock W83627H
Mov al,87h
Out dx,al
Out dx,al
;--------------------------------------------------------
Mov al,07h ; Select registers of watchdog timer
Out dx,al
Inc dx
Mov al,08h
Out dx,al
;--------------------------------------------------------
```

```
Dec dx ; Enable the function of watchdog timer
Mov al,30h
Out dx,al
Inc dx
Mov al,01h
Out dx,al
;--------------------------------------------------------
Dec dx ; Enable watchdog timer to be strobed reset by keyboard
Mov al,0f7h
Out dx,al
Inc dx
In al,dx
Or al,40h
Out dx,al
;--------------------------------------------------------
Dec dx ; lock W83627HF
Mov al,0aah
Out dx,al
```

5. Generate a time-out signal without timer counting

```
;--------------------------------------------------------
Mov dx,2eh ; unlock W83627H
Mov al,87h
Out dx,al
Out dx,al
;--------------------------------------------------------
Mov al,07h ; Select registers of watchdog timer
Out dx,al
Inc dx
Mov al,08h
Out dx,al
```

```
;--------------------------------------------------------------
Dec dx ; Enable the function of watchdog timer
Mov al,30h
Out dx,al
Inc dx
Mov al,01h
Out dx,al
;--------------------------------------------------------------
Dec dx ; Generate a time-out signal
Mov al,0f7h
Out dx,al ;Write 1 to bit 5 of F7 register
Inc dx
In al,dx
Or al,20h
Out dx,al
;--------------------------------------------------------------
Dec dx ; lock W83627HF
Mov al,0aah
Out dx,al
```

APPENDIX D

Accessory Kit Assembly

This appendix shows how to connect to a CD-ROM via the CompactFlash slot.:

Appendix D Accessory Kit Assembly

D.1 CompactFlash to IDE Transfer Kit

Please follow this assembly procedure to use the CompactFlash slot to connect with a CD-ROM drive.

1. Connect the IDE cable to the adapter board.

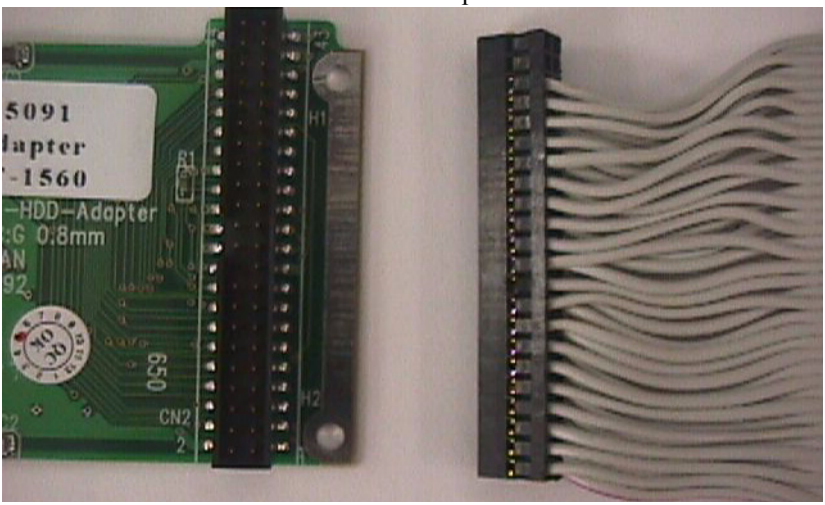

Figure D.1: Adapter Board and IDE Cable

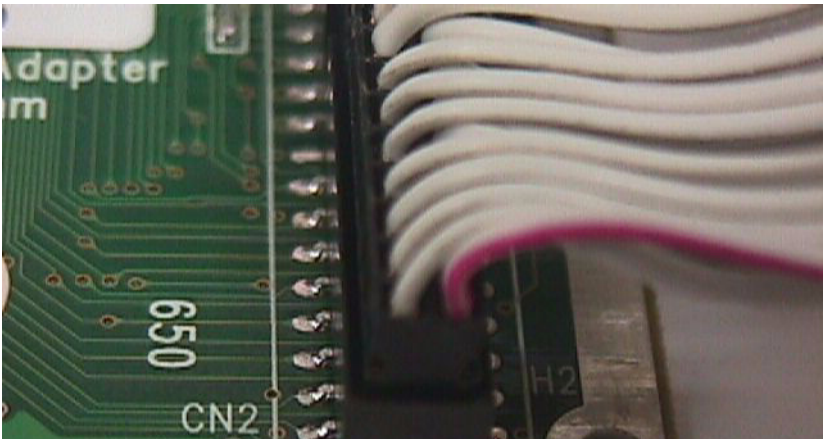

Figure D.2: Connecting Adapter Board & IDE Cable

Note *Pin 1 is marked red*

2. Insert the adapter board into the CompactFlash slot.

Figure D.3: CompactFlash Slot

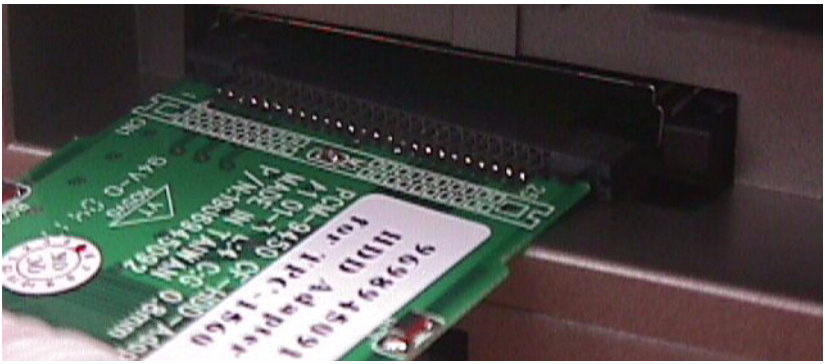

Figure D.4: Insert the Adapter Board into the CF slot

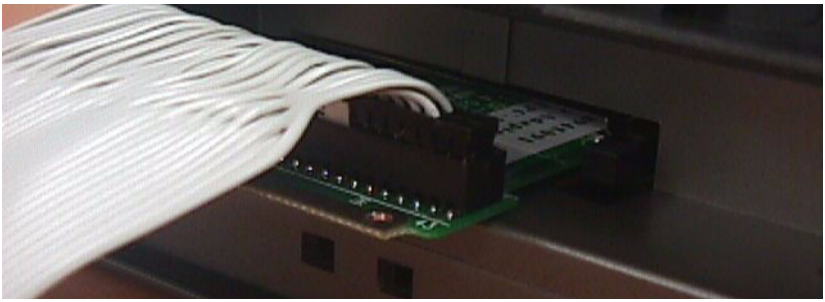

Figure D.5: Inserted Adapter Board

Connect the CD-ROM to the adapter board via the IDE cable and then connect the external power line to the CD-ROM.

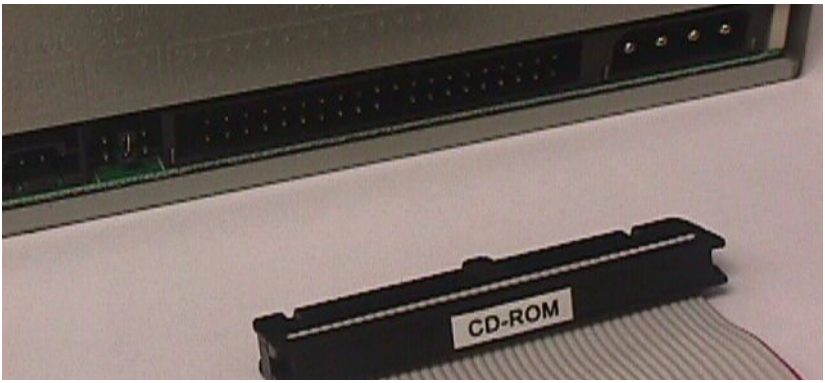

Figure D.6: Connect the CD-ROM via the IDE Cable

Figure D.7: Plug Power Line into CD-ROM Drive

D.2 USB Driver Installation Notice

It is required to install the service pack if you want to install the USB 2.0 driver on Windows 2000/XP

Note *Please make sure Windows 2000 Service Pack 4 is installed before you install the USB 2.0 driver on Windows 2000. Service Pack 1 must be installed on Windows XP before you install the USB 2.0 driver.*

APPENDIX E

HDD Kit Assembly

Appendix E HDD Kit Assembly

Please follow the assembly procedure to install the HDD into the system.

1. Remove the rear cover.

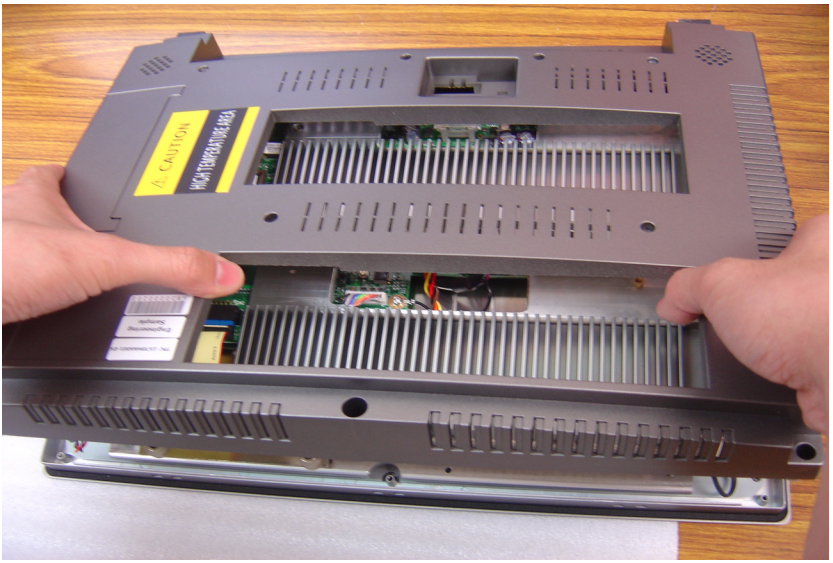

Figure E.1: Removing the Rear Cover

2. De-assemble the HDD kit from the system. Please remove the two screws and take the transparent rubber cushion off..

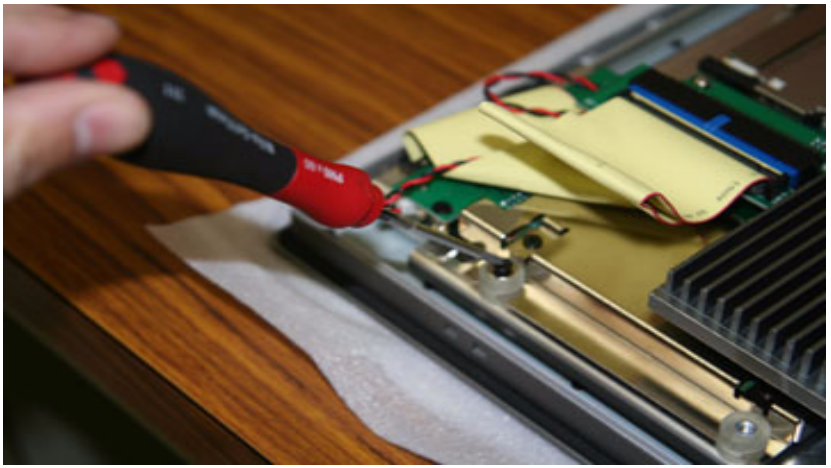

Figure E.2: Removing the Top Screws

Figure E.3: Removing the HDD kit

3. Pull out the HDD kit from the system

.

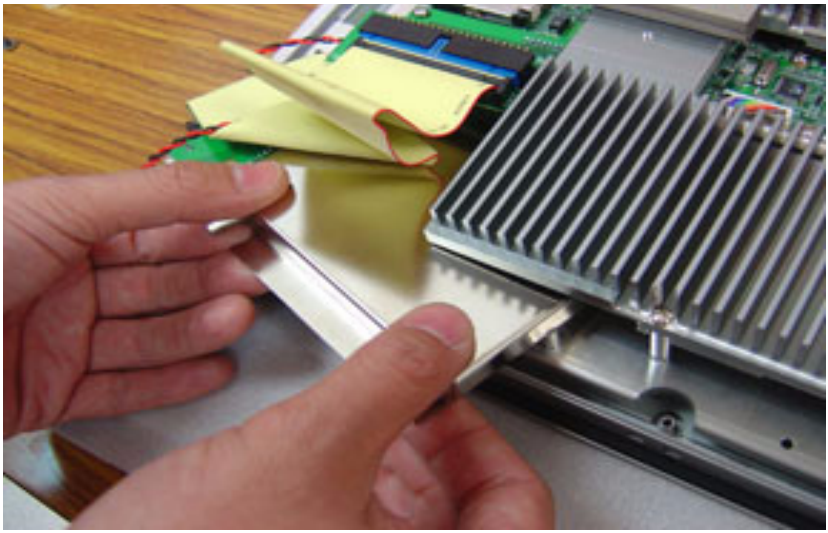

Figure E.4: Pulling out the HDD bracket

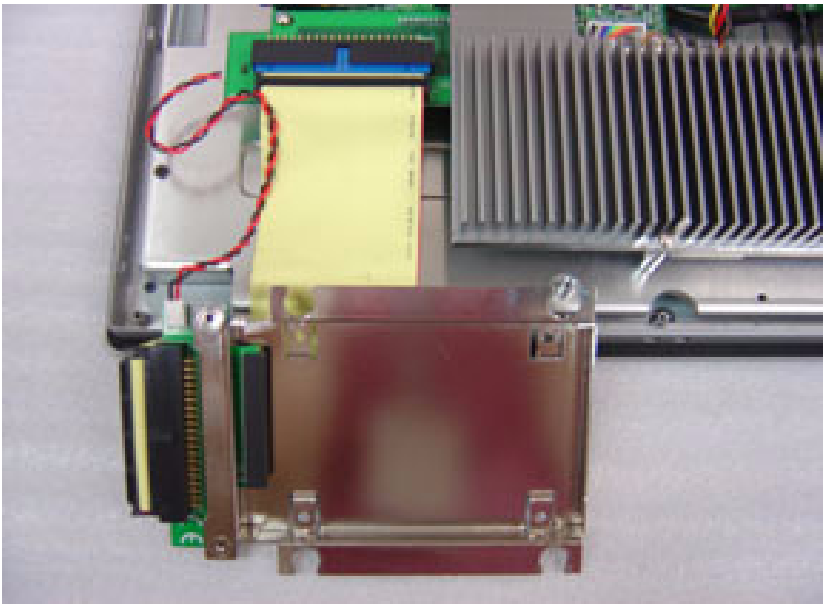

Figure E.5: The HDD Bracket

4. Put the HDD into the HDD holder.

Figure E.6: Installing the HDDr

5. Link the HDD with the HDD cable connector and fasten the HDD module with the screws.

Figure E.7: Linking the HDD with the Connector

6. Fasten the HDD cover with screws

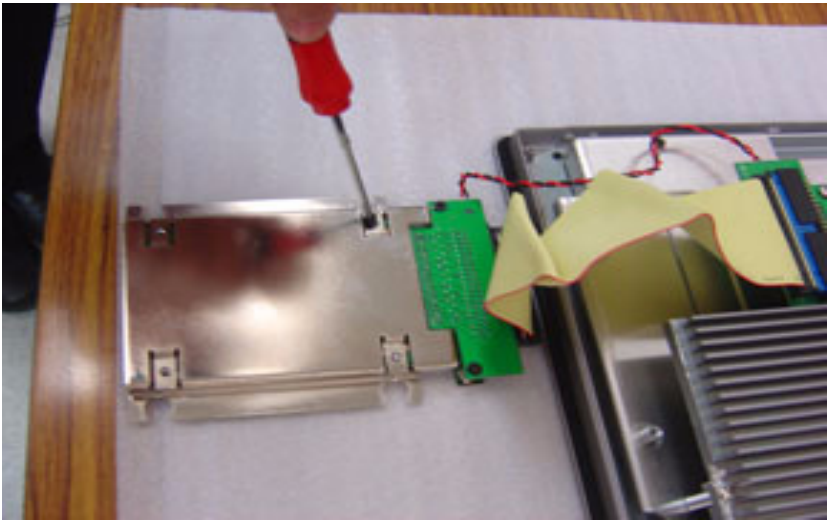

Figure E.8: Fastening the HDD cover

7. Place the HDD kit into the system: Align to the HDD chamfer as shown the below in red circle and then slide the HDD module into the system sideways.

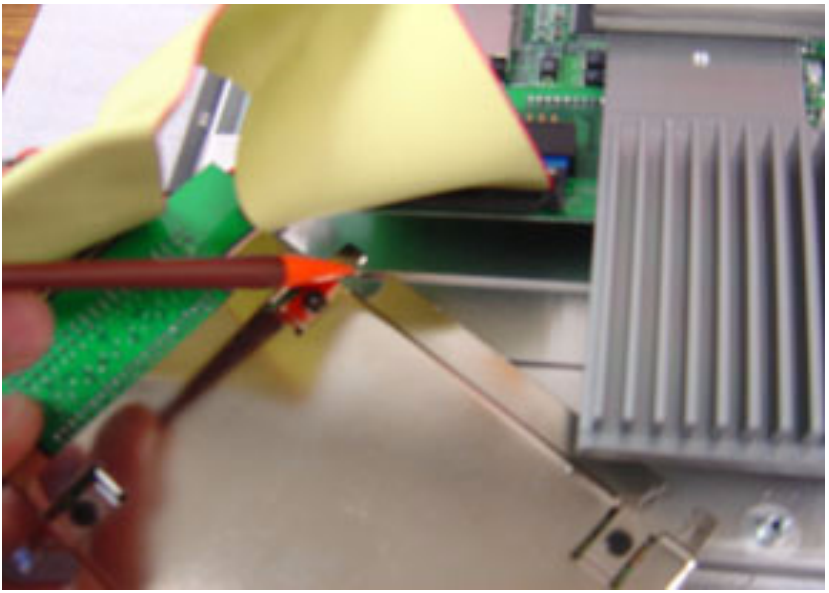

Figure E.9: Chamfer

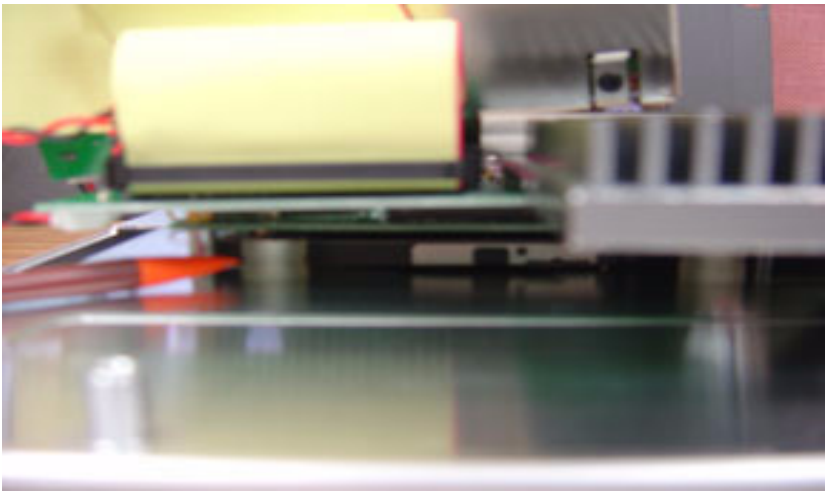

Figure E.10: Chamfer & Rubber

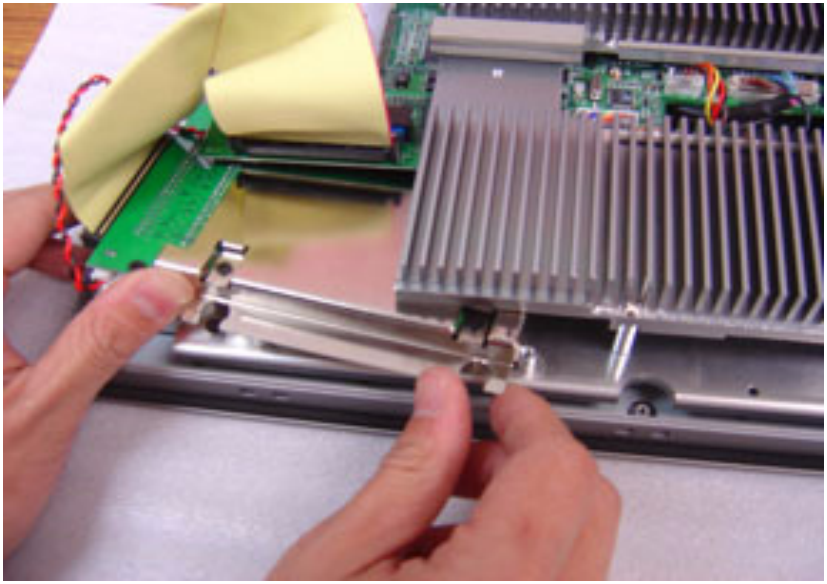

Figure E.11: Sliding the HDD Into Position

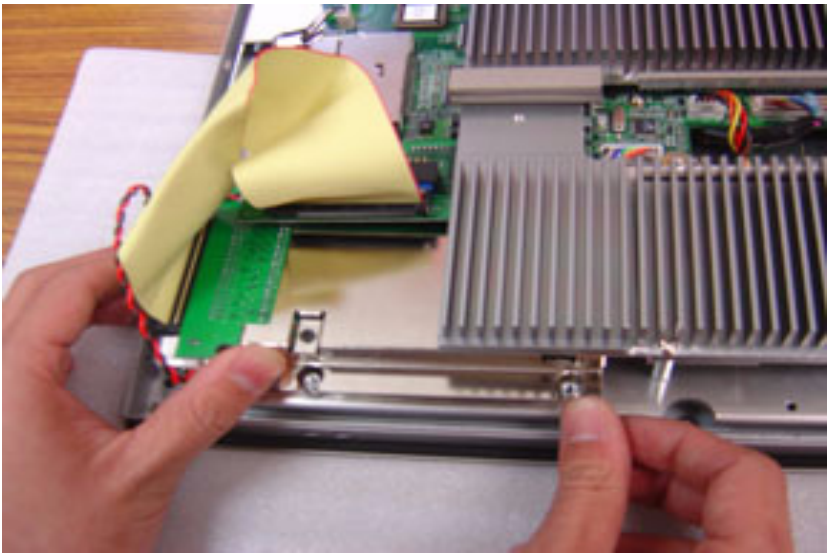

Figure E.12: Completed HDD Installation

7. Mount the two rubber cushions on the HDD kit and fasten the HDD kit with the system by screws

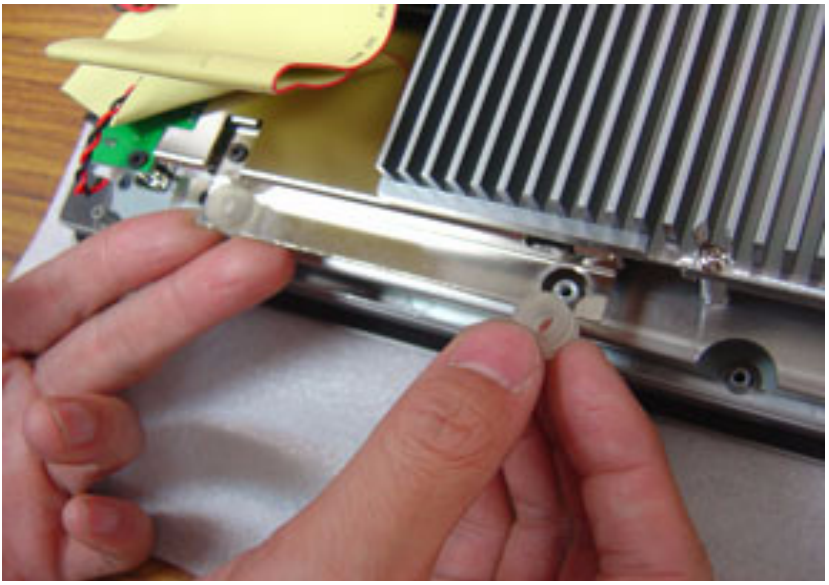

Figure E.13: Mounting the Rubber Cushions

Figure E.14: Fastening the HDD Module

8. Place the rear cover back into position.

Figure E.15: Reinstalling the Rear Cover

Note: SATA HDDs only support data transfer rates of SATA 1 (1.5Gbits/sec), if your HDD is SATA 2 (3.0Gbits/sec) please adjust the jumper to 1.5Gbits/sec

APPENDIX F

Touchscreen Installation & Configuration

This appedix demonstrates how to install the PenMount 9000 touchscreen and set the configuration on TPC-1260H. This section uses Windows XP as an example.

Appendix F Touchscreen Installation & Configuration

F.1 Driver Installation

Please insert the x86 TPC series support CD and go to the Windows 2000-XP driver folder (TPC-1570H\Driver\Touch Screen\Driver\Windows 2000-XP Driver V4.01). Click setup.exe

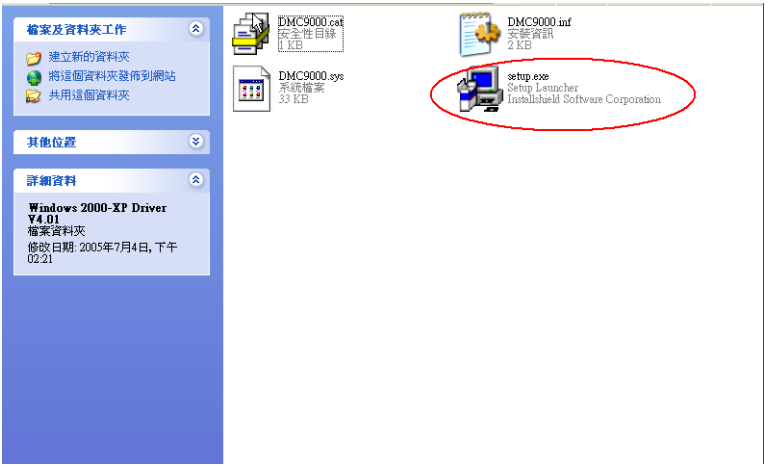

Figure F.1: Setup.exe

The screen displays the installation wizard for the PenMount software. Click “Next”. Follow the installation wizard step by step.

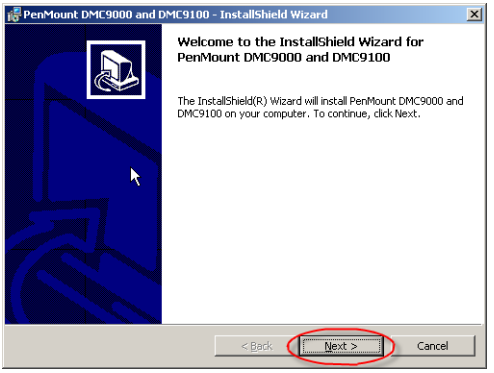
PenMount DMC9000 and DMC9100 - InstallShield Wizard
Welcome to the InstallShield Wizard for PenMount DMC9000 and DMC9100
The InstallShield(R) Wizard will install PenMount DMC9000 and DMC9100 on your computer. To continue, click Next.
< Back
Next >
Cancel

Figure F.2: Install - Wizard

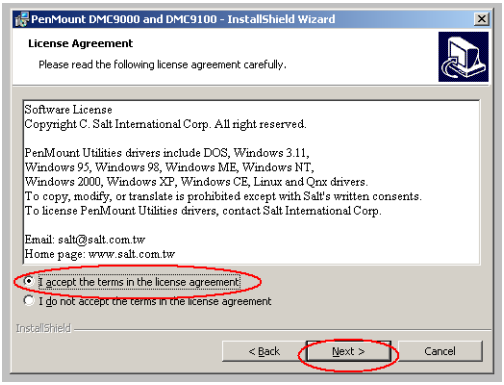
PenMount DMC9000 and DMC9100 - InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
Software License
Copyright C. Salt International Corp. All right reserved.
PenMount Utilities drivers include DOS, Windows 3.11,
Windows 95, Windows 98, Windows ME, Windows NT,
Windows 2000, Windows XP, Windows CE, Linux and Qnx drivers.
To copy, modify, or translate is prohibited except with Salt's written consents.
To license PenMount Utilities drivers, contact Salt International Corp.
Email: salt@salt.com.tw
Home page: www.salt.com.tw
I accept the terms in the license agreement
I do not accept the terms in the license agreement
InstallShield
< Back
Next >
Cancel

Figure F.3: Install – License Agreement

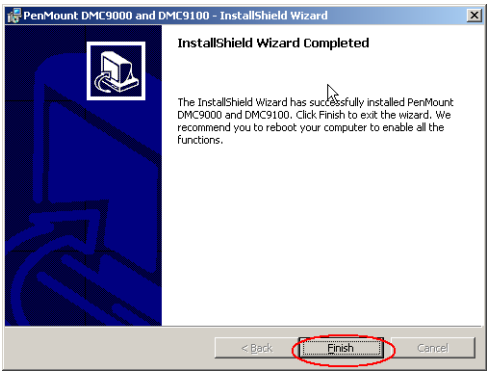
PenMount DMC9000 and DMC9100 - InstallShield Wizard
InstallShield Wizard Completed
The InstallShield Wizard has successfully installed PenMount DMC9000 and DMC9100. Click Finish to exit the wizard. We recommend you to reboot your computer to enable all the functions.
< Back
Finish
Cancel

Figure F.4: Install – Completed

F.2 Uninstall the Driver

Please go to Settings and then select Control Panel. Please click Add/ Remove Programs.

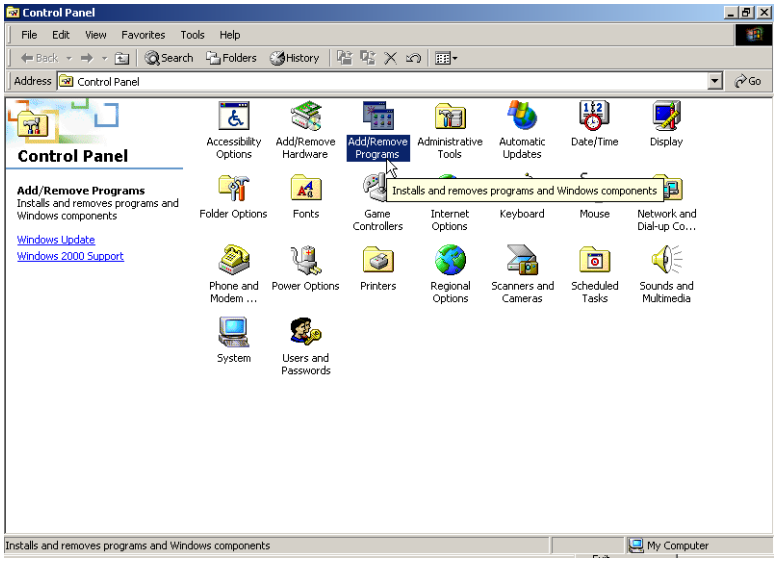

Figure F.5: Uninstall -1

Select PenMount DMC9000 and DMC9100. Click Remove button.

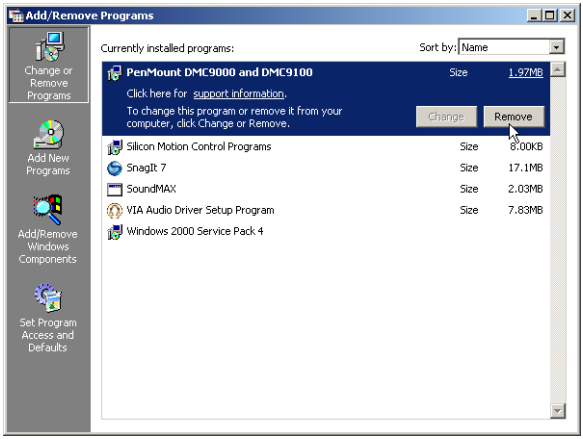
Add/Remove Programs
Change or Remove Programs
Add New Programs
Add/Remove Windows Components
Set Program Access and Defaults
Currently installed programs:
Sort by: Name
PenMount DMC9000 and DMC9100
Size 1.97MB
Click here for support information.
To change this program or remove it from your computer, click Change or Remove.
Change
Remove
Silicon Motion Control Programs Size 8.00KB
SnagIt 7 Size 17.1MB
SoundMAX Size 2.03MB
VIA Audio Driver Setup Program Size 7.83MB
Windows 2000 Service Pack 4

Figure F.6: Uninstall -2

Select “Yes” to remove the PenMount Windows 2000/SP driver and reboot the system.

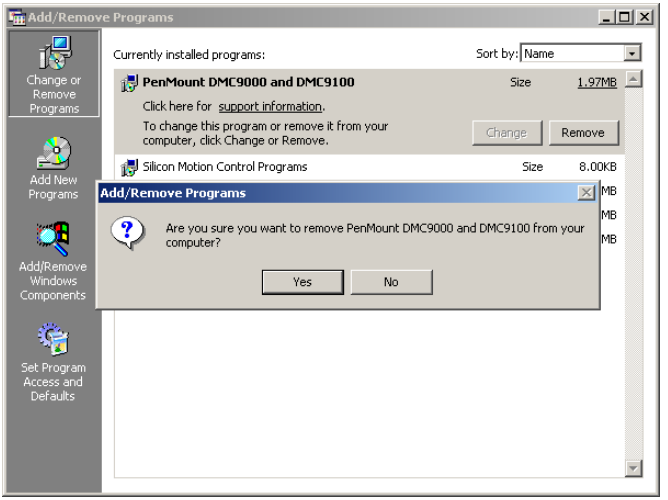

Figure F.7: Uninstall -3

F.3 Touchscreen Calibration

The “PM”, the icon of the PenMount Control Panel, is in the menu bar after the touchscreen installation. Please click the icon “PM” to call PenMount Control Panel. It contains six functions: Calibrate, Draw, Multiple Monitors, Option, and About. Multiple Monitors is for multiple displays only; however TPC-1570H only provides one touchscreen display. This function is not workable on TPC-1570H. About is to show the driver version.

Calibrate

Two ways to calibrate the touch screen include “Standard Calibration” and “Advanced Calibration”. Standard Calibration is to adjust most touchscreens.

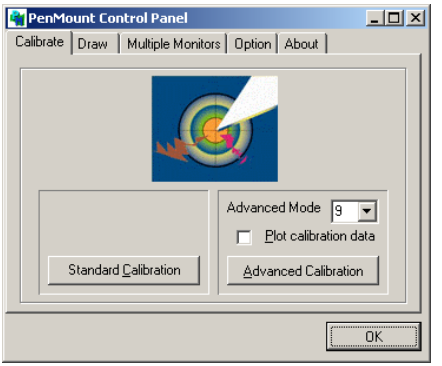

Figure F.8: Standard Calibration -1

Figure F.9: Standard Calibration -2



Figure F.10: Standard Calibration -3

Note *Touch the red squares in sequence. The calibration is completed after the fifth touch red point is calibrated. Press "ESC" to skip.*

Advanced Calibration is for the aged touchscreens by using 4, 9, 16 or 25 points to calibrate touch panel.

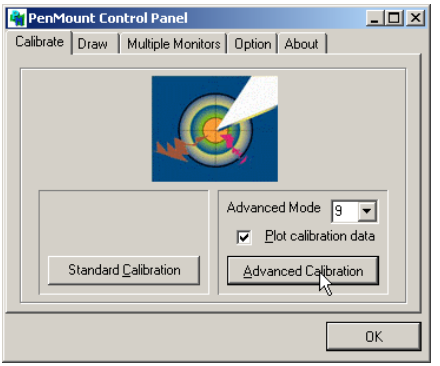

Figure F.11: Advanced Calibration -1

Figure F.12: Advanced Calibration -2

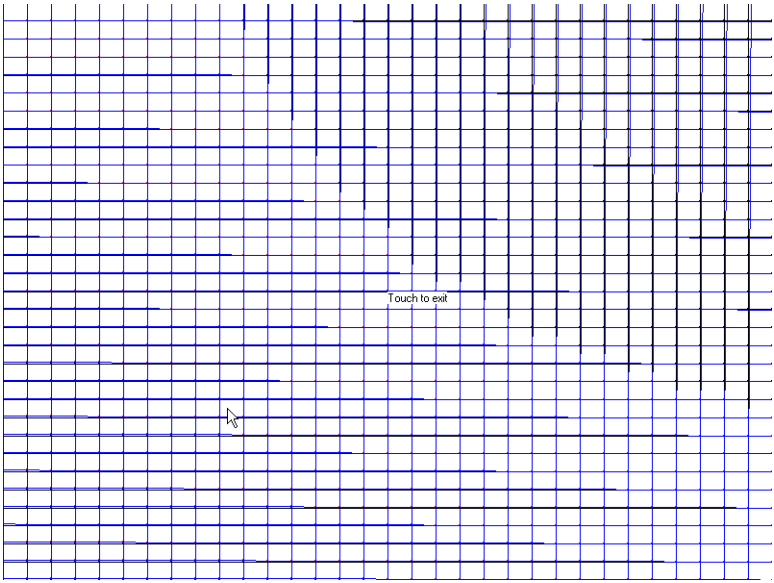

Figure F.13: Plot Calibration Data

Note *Plot Calibration Data enabled provides the blue lines to show linearity before calibration and black lines to show linearity after calibration when you finished the advanced calibration.*

Draw

This is to test the touch screen operation. Its display shows touch location.

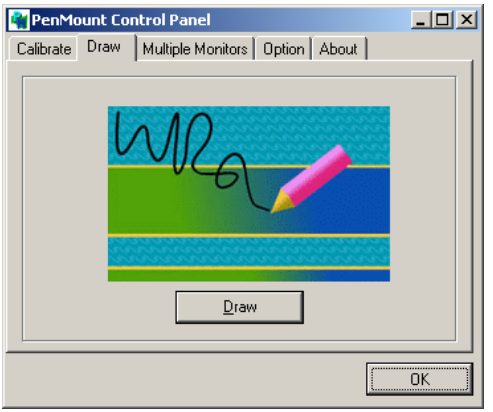

Figure F.14: Draw

Click “menu” and then click “clear screen” to clear the drawing.





Figure F.15: Clear Screen

Option

This option is to set the operation mode and beep sounds if the beep sound is enabled. The operation mode, stream mode and point mode, is to enable/ disable the mouse's ability to drag on-screen icons. Stream mode let the mouse functions as normal and dragging on-screen. Point mode is only let the mouse a click function. The dragging on-screen is disabled. Users can turn on / off the beep sound by clicking the "enable beep sound".

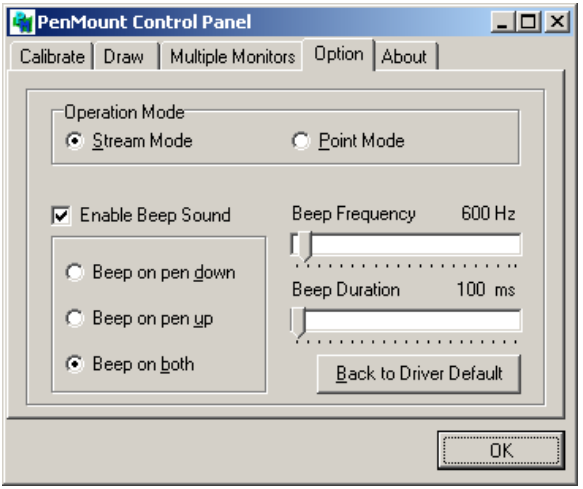

Figure F.16: Option

APPENDIX G

Fuse Specifications

Appendix G Fuse Specifications

G.1 Fuse Specifications

Rating: 250VAC, 3.15Amp

Size: 5 x 20mm

Note	*The fuse is set to break as the input voltage exceeds 33VDC for your protection.*

G.2 Fuse Replacement

Step 1: Remove the fuse cover

Step 2: Replace the damaged fuse with a new one

Step 3: Place the fuse cover back in position

Figure G.1: Fuse Replacement

Warning	*Do NOT replace the fuse unless it is damaged.* *Do NOT replace the fuse with a different rating.*